

# Precision Test Adapters

## 1.35 mm(F) to 1.85 mm(F)

**WithWave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. **This 1.35 mm(F) to 1.85 mm(F)** adapter is manufactured to precise microwave specifications and constructed with female gender on both sides.

The precision microwave connector interfaces ensure an excellent microwave performance up to 67 GHz



### ■ Features

- Frequency range : DC to 67 GHz
- VSWR : 1.3 : 1(Max) @ 67 GHz
- Stainless steel (passivated)

### ■ Specification

Scope	Specification	AD26F01FS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 67 GHz
	VSWR (Max)	1.3 : 1 @ 67 GHz
Material	Dielectric	Ultem 1000
	Center Contact	Beryllium copper with gold plated
	Body	Passivated Stainless Steel

\* RoHS Compliant


# Precision Test Adapters

## 1.35 mm(F) to 1.85 mm(F)

### ■ Drawing

**Part No.: AD26F01FS1**

Unit : mm

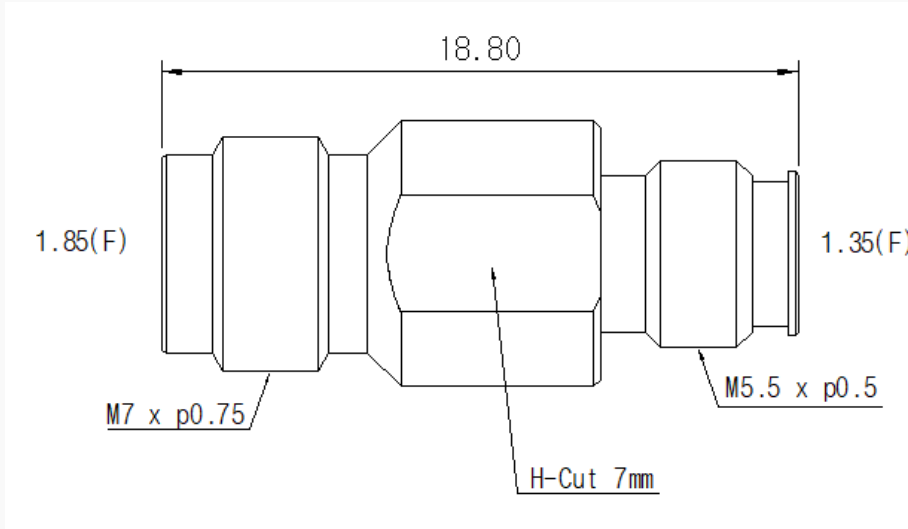

### ■ Test Result

▪ Frequency : 10 MHz to 67 GHz

