Precision Test Adapters 1.85 mm(F) to 1.85 mm(F) : Bulkhead type

Withwave's Precision Test Adapters are designed based on precision microwave interconnection technologies. This 1.85 mm(F) to 1.85 mm(F) adapter with Bulkhead manufactured to precise microwave specifications and constructed with female gender on side 1 and female gender on side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 67GHz



withwave

Versatile RF & MW Test Solutions

Features

- Frequency range : DC to 67 GHz
- VSWR : 1.30 : 1(Max) @ 67 GHz
- Stainless steel (passivated)

Specification

Scope	Specification	AD01F01FS2
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 67 GHz
	VSWR (Max)	1.30: 1
Material	Dielectric	Special dielectric
	Center Contact	BeCu with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-65 to +165 °C

* RoHS Compliant


1.85 mm(F) to 1.85 mm(F) : Bulkhead type



Drawing

Part No.: AD01F01FS2

Unit : mm

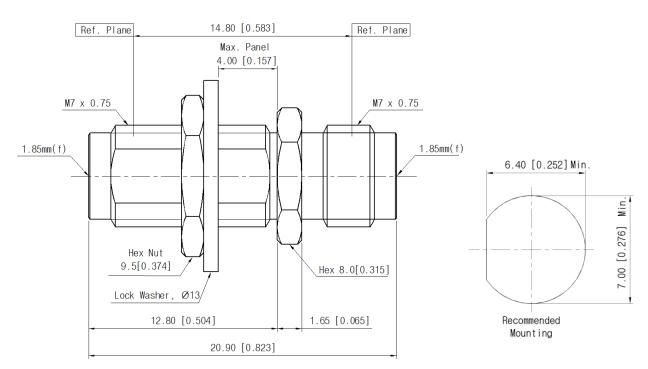

Test Result



sales@with-wave.com 190801 Ver1.0