# Precision Test Adapters

## 2.4 mm(M) to 2.4 mm(F): Bulkhead type



**Withwave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 2.4 mm(M) to 2.4 mm(F) adapter with bulkhead is manufactured to precise microwave specifications and constructed with male gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 50 GHz



#### Features

- Frequency range : DC to 50 GHz- VSWR : 1.20 : 1(Max) @ 50 GHz

- Stainless steel (passivated)

### Specification

Scope	Specification	AD02M02FS2
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 50 GHz
	VSWR (Max)	1.20: 1
Material	Dielectric	Special dielectric
	Center Contact	BeCu with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-65 to +165 °C

\* RoHS Compliant


# Precision Test Adapters

## 2.4 mm(M) to 2.4 mm(F): Bulkhead type



### Drawing

Part No.: AD02M02FS2 Unit : mm

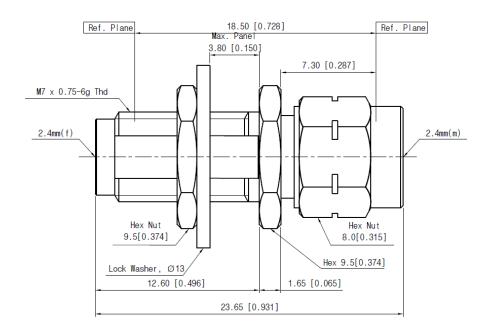

#### Test Result

