


High Speed & Microwave Interconnect Solutions

Excellent Solutions up to 110 GHz & 145 GHz

224/480 Gbps(PAM 4)

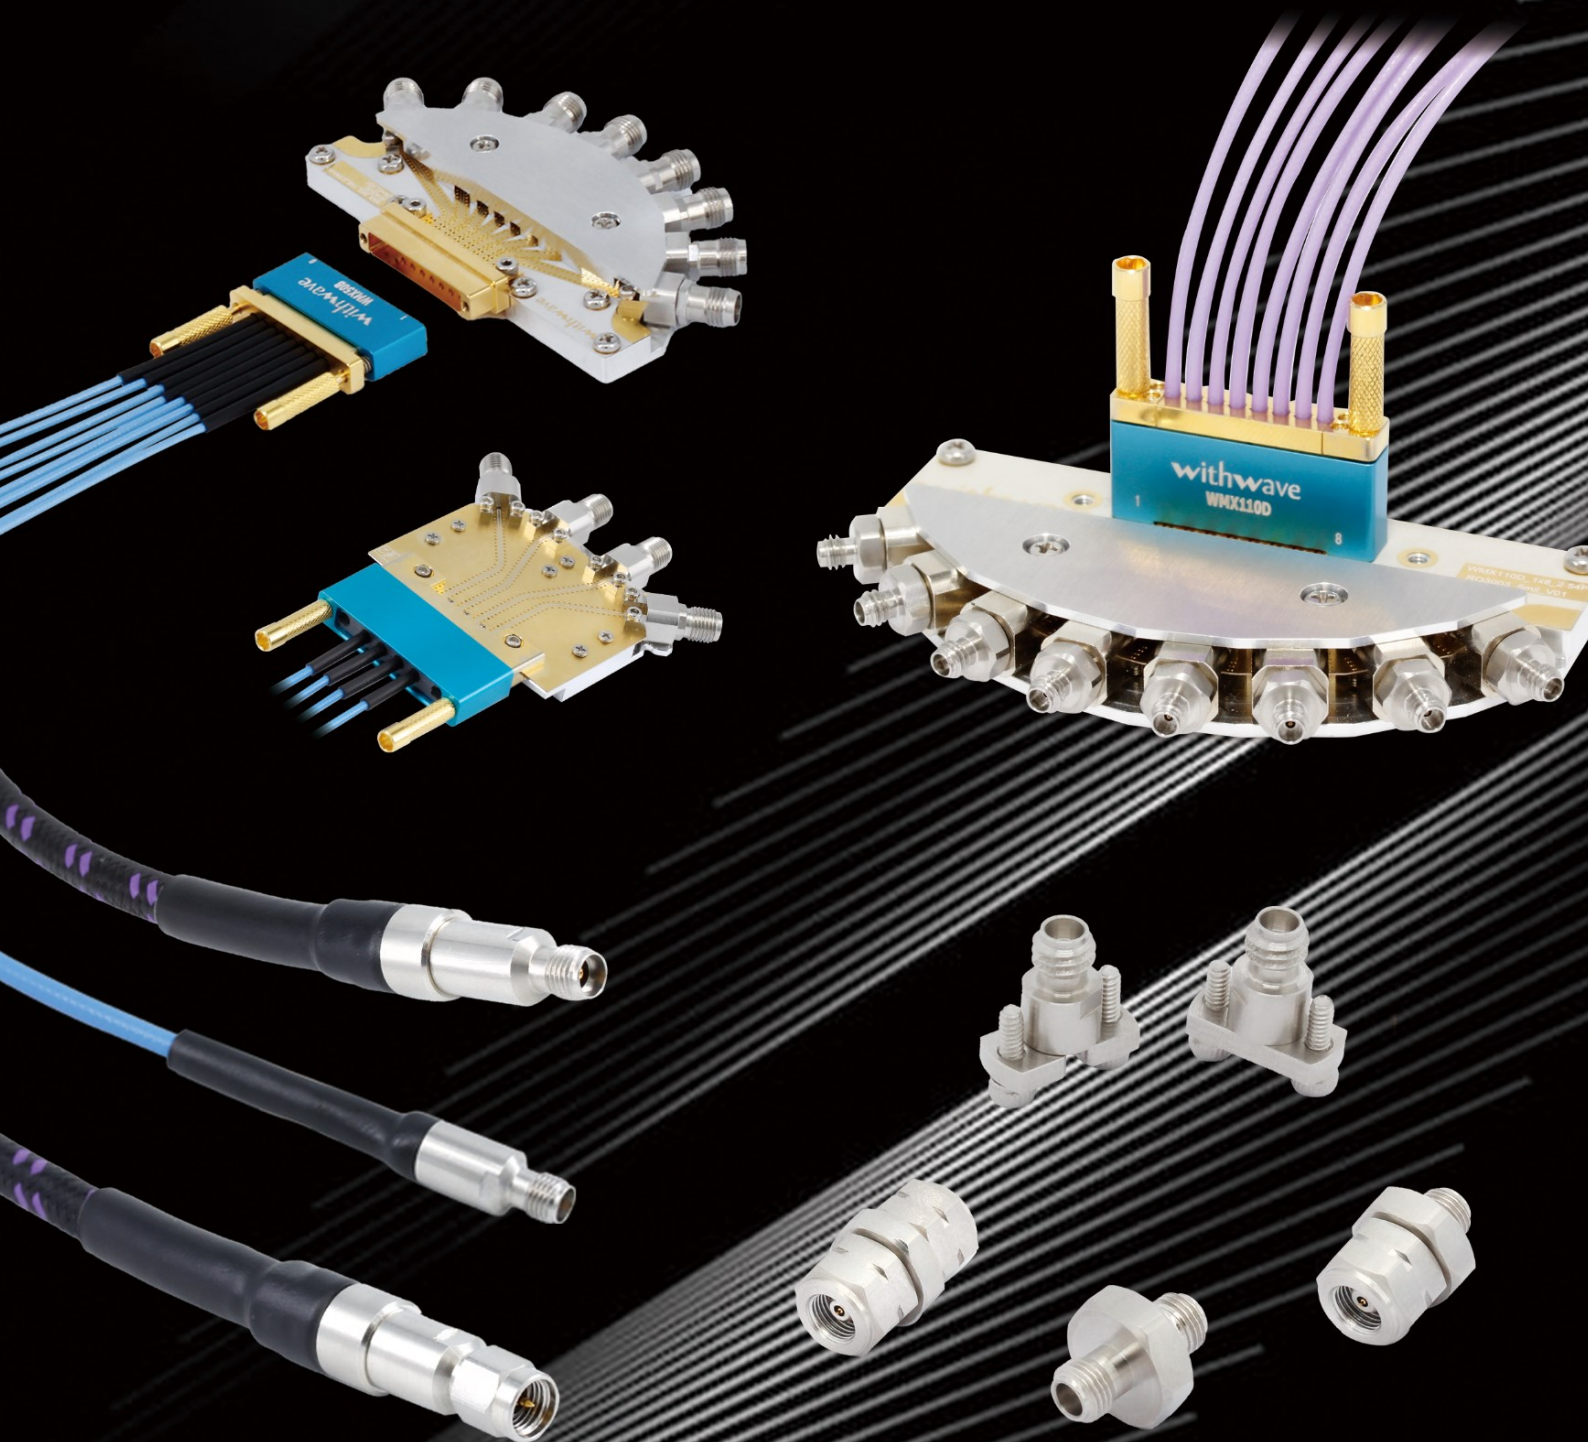

High Speed Multicoax Cable


· WMX Series



480 Gbps (PAM4)

Vertical Mount

- DC to 20, 40, 50, 67, 110 & **145 GHz**
- Socket & Direct Contact type (Solderless)
- 1x8, 2x8 Channel
- Pitch : 2.54 mm & 4.0 mm

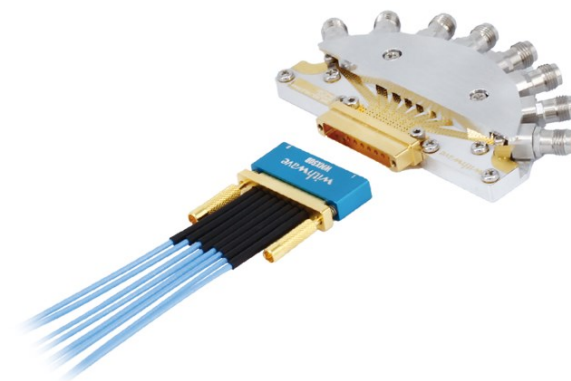


224 Gbps (PAM4)

Edge Mount

- DC to 20, 40, 50 & **67 GHz**
- Board Edge Socket Contact type (Solderless)
- 1x8 Channel
- Pitch : 2.54 mm


· SMPM & SMPS Series

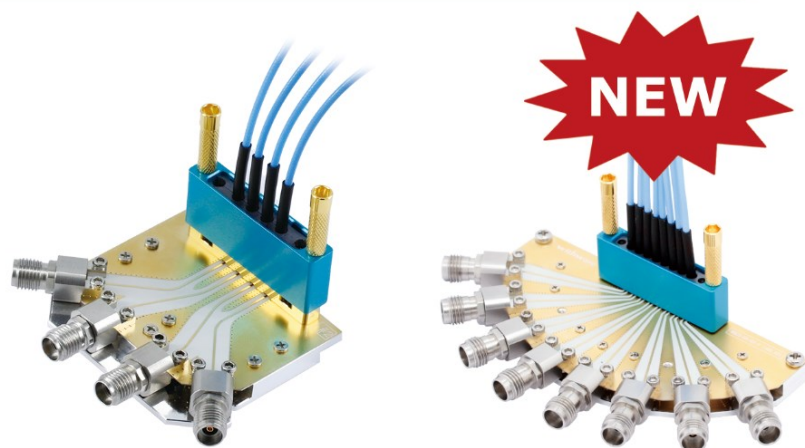

SMPS (67 GHz)

Vertical Mount

- DC to 40 & **67 GHz**
- SMPM & SMPS Connectors (Solderless)
- 1x4, 1x8 Channel
- Pitch : 2.54 & 4.0 mm

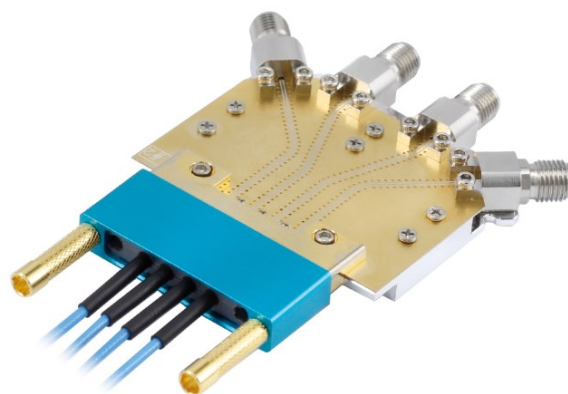

Edge Mount

- DC to **40 GHz**
- Solderless SMPM Connector
- 1x4 Channel
- Pitch : 4.0 mm

Test & Measurement

Solderless Board Mount Connectors

480 Gbps(PAM 4)

Vertical Mount

- DC to 40, 50, 67, 110 & **145 GHz**
- 2.92 mm, 2.4 mm, 1.85 mm, 1.0 mm & 0.8 mm
- Easy Installation & No Soldering required



Edge Mount

- DC to 40, 50, 67, 110 & **145 GHz**
- 2.92 mm, 2.4 mm, 1.85 mm, 1.0 mm & 0.8 mm
- Easy Installation & No Soldering required



Precision Adapters

0.8 mm to 1.0 mm

110 GHz



AD23M00MS1
(M to M)



AD23M00FS1
(M to F)



AD23F00MS1
(F to M)



AD23F00FS1
(F to F)

0.8 mm to 0.8 mm

145 GHz



AD23M23MS1
(M to M)



AD23F23MS1
(F to M)



AD23F23FS1
(F to F)

Low loss Microwave Cable

1.0 mm

110 GHz



W601 (Male)



W601 (Female)



WT110 (Male)



WT110 (Female)

0.8 mm

145 GHz



W602 (Male)



W602 (Female)



WT145 (Male)



WT145 (Female)

