

Withwave's Directional Coupler offer frequency range from 0.4 GHz to 20 GHz and low insertion loss & VSWR. This Coupler (BC04200-10-SF) have 10 dB coupling & 14 dB directivity characteristics.

■ Features

- Nominal Coupling : 10 dB
- Directivity : 14 dB (Min.)
- SMA Connector (Female)



■ Specification

Scope	Specification	BC04200-10-SF
Electrical	Impedance	50 Ohm
	Freq. range	0.4 to 20 GHz
	Nominal Coupling	10 ±1.0 dB
	Insertion Loss	1.9 dB (Max.)
	VSWR Primary	1.40: 1 (Typ.) 1.50: 1 (Max.)
	VSWR Secondary	1.30: 1 (Typ.) 1.50: 1 (Max.)
	Directivity	14 dB (Min.)
	Average Power	30 W
Mechanical & Environmental	Input / Output Connector	SMA (Female)
	Weight	90 g
	Material	Aluminum
	Finishing	Black paint


Directional Coupler

0.4 to 20 GHz
10 dB Coupling

withwave
Next Generation Connectivity

■ Drawing

Unit : mm
Outline Tolerances ± 0.5
Mounting Holes Tolerances ± 0.2

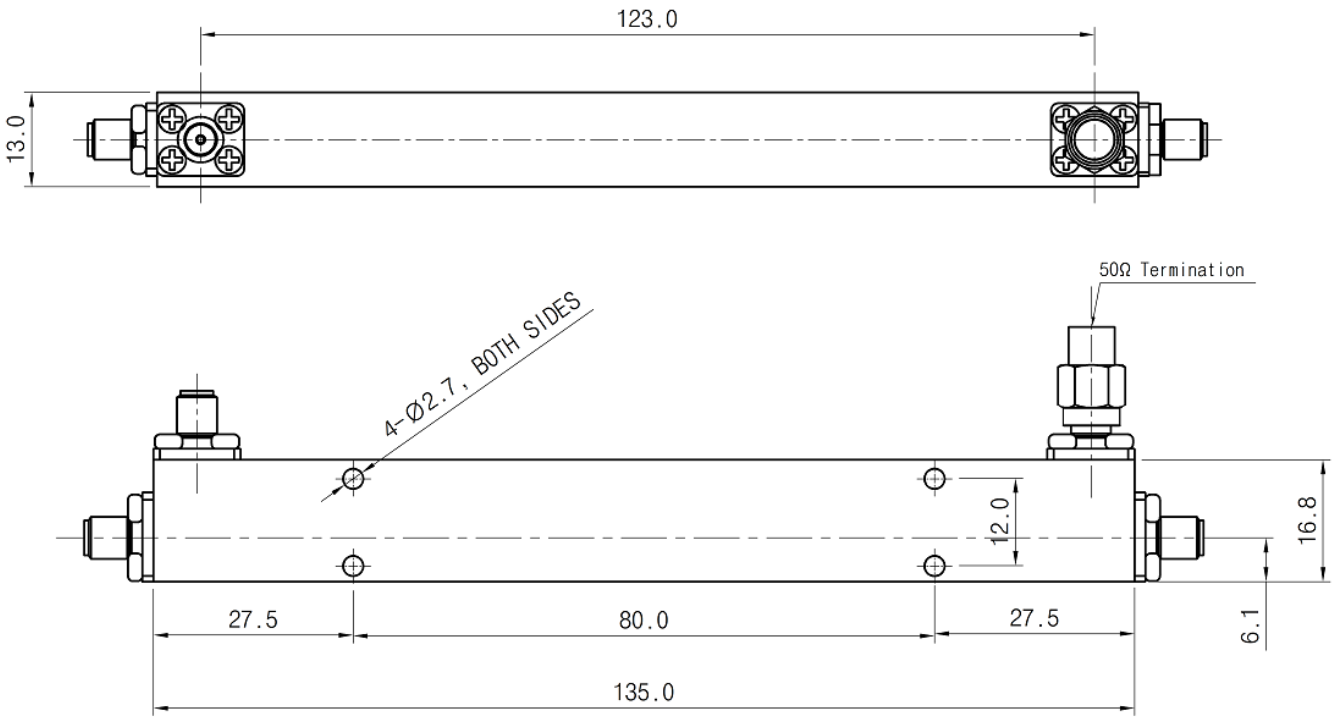


Measurement


Insertion Loss (S21)




Primary VSWR

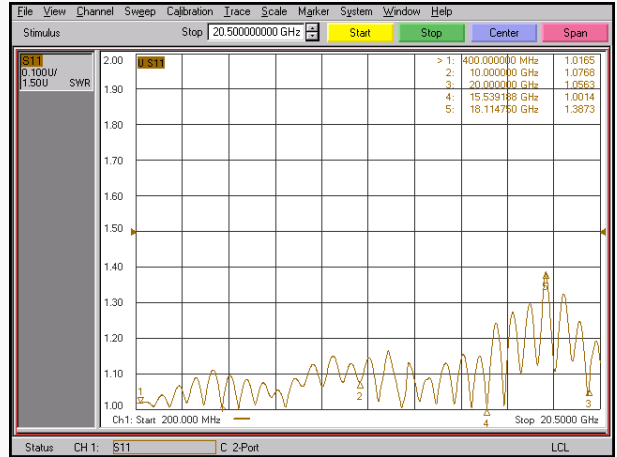

Secondary VSWR

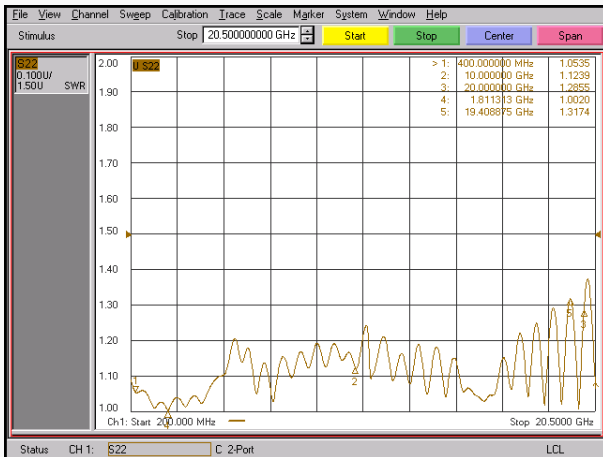

Directivity

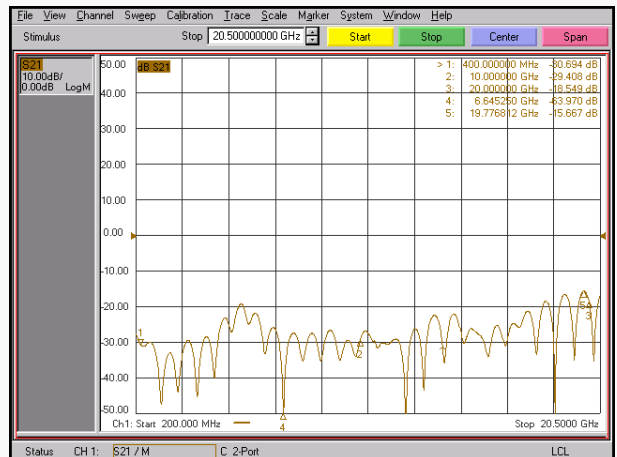

Nominal Coupling

