


Non Magnetic Connectors



# Non-Magnetic Connectors

**Withwave's Non-Magnetic Connectors** are widely used in applications that experience strong magnetic field can cause interference or introduce errors such as quantum computing, magnetic resonance imaging(MRI) equipment, the aerospace industry. They features a DC to 40 GHz frequency range and are available in various interface sizes.

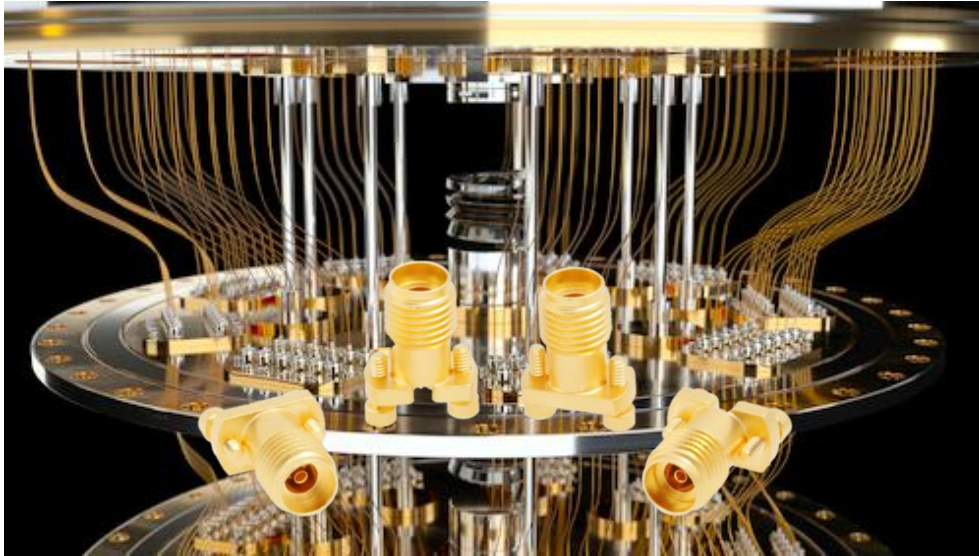





## Features

- Non-magnetic Material(BeCu) and plating
- DC to 40 GHz
- Vertical & End Launch Types

## Application

- Quantum Computing
- Military & Space
- Medical Devices

Product	Part No.	Description
	VC03FS001C1	Vertical Launch 2.92 mm(Microstrip)
	VC03FS002C2	Vertical Launch 2.92 mm(Stripline)
	NE03FS001C1	End Launch 2.92 mm(Narrow Block)
	SM03FS009C1	Board Edge 2.92 mm (Board Clearance: 1.1 mm)