

Withwave's Power Divider offers frequency range from 15 to 26.5 GHz and low insertion loss & VSWR. This divider (PD150265-2-SF) is capable of handing power up to 20 Watts.

■ Features

- 2 Way Type
- SMA Connector (Female)




■ Specification

Scope	Specification	PD-150265-2-SF
Electrical	Impedance	50 Ohm
	Freq. range	15 to 26.5 GHz
	Insertion Loss (Max.)	3.8 dB
	Isolation (Min.)	18 dB
	VSWR (Max.)	Input 1.50 :1 Output 1.50 : 1
	Amplitude Imbalance	± 0.3 dB
	Phase Imbalance	± 4 degree
Mechanical & Environmental	Port Connector	SMA (Female)
	Weight	20 g
	Operation Temperature	-45 °C to +85 °C

■ Drawing

Unit : mm
Outline Tolerances ± 0.5
Mounting Holes Tolerances ± 0.2

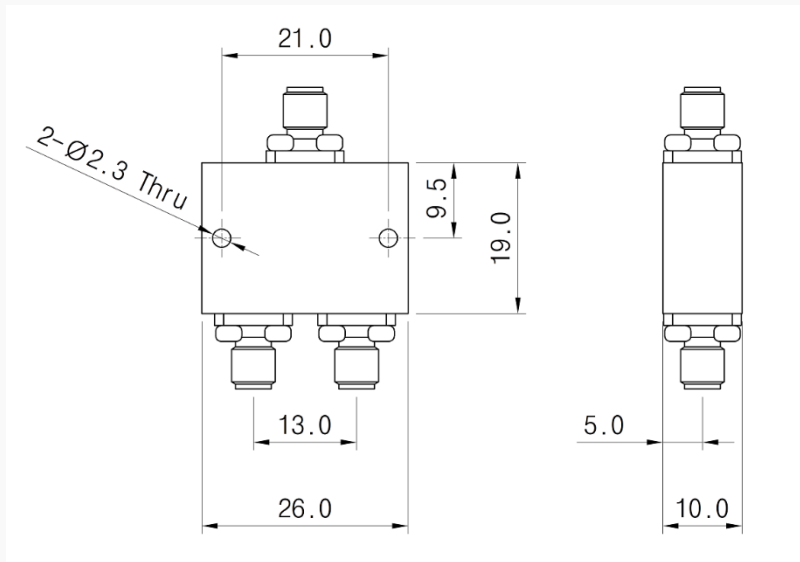


Measurement


Insertion loss/Amplitude imbalance




Phase Imbalance

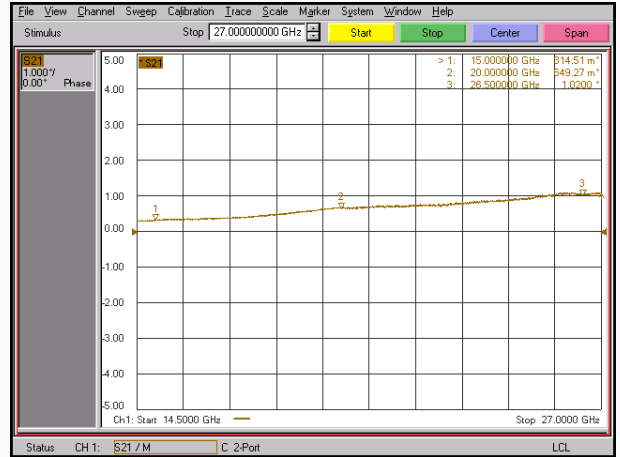

Input VSWR

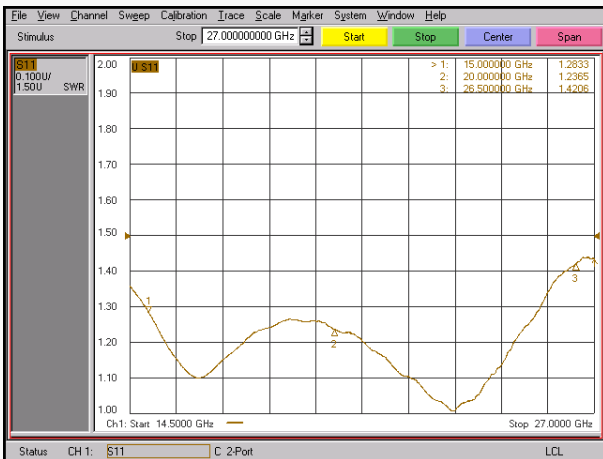

Output VSWR

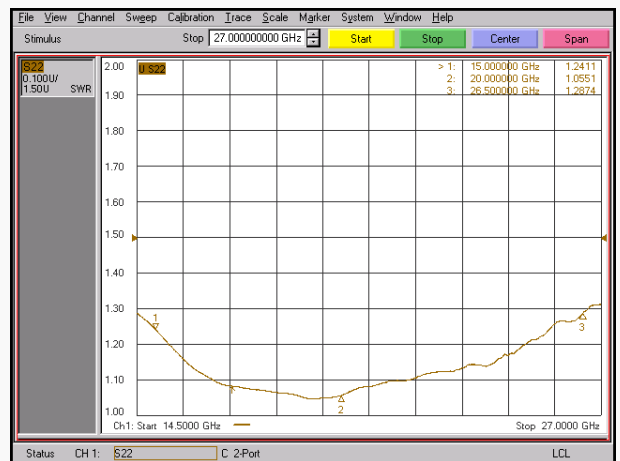

Isolation

