

WithWave's terminations are composed of broadband, due to the coaxial construction, It offers a excellent performance specified from DC to 50 GHz. Precision 2.4 mm coaxial connector interfaces ensure an good impedance match across wide bandwidth.

■ Features

- DC to 50 GHz
- VSWR (Max): 1.10
- 2.4 mm (Male) type




■ Specification

| Scope | Specification | TM02-01-06 |
|------------|-------------------|-----------------------|
| Electrical | Impedance(Ohm) | 50 |
| | Freq. range (GHz) | DC to 50 GHz |
| | VSWR (Max) | 1.10 : 1 |
| | Power rating | 0.5 Watts |
| Material | Center Contact | BeCu with gold plated |
| | Body & Connector | Stainless Steel |

* RoHS Compliant

■ Drawing

Unit : mm[inch]

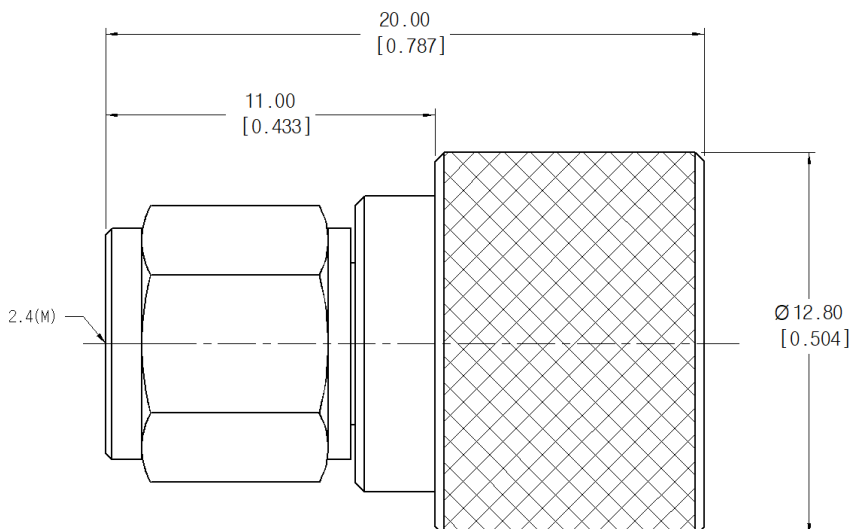

■ Test Result (Return Loss)

Freq: 10 MHz to 50 GHz

