

A

B

C



D

E

F

<Specification>

1. Electrical

1-1. Impedance : 50Ω

1-2. Frequency range : DC to 67GHz

1-3. VSWR(dB) : 1.2 : 1(-20.8dB)

2. Material

2-1. Body : Stainless Steel(STS303)

2-2. Pin : BeCu(C17300)

2-3. Insulator : Ultem1000

2-4. Hex Nut : Stainless Steel(STS303)


3. Mechanical

3-1. Durability : 500 Cycles

4. Environmental

1) Temp. Range : -40℃ to +125℃

2) RoHS Compliant

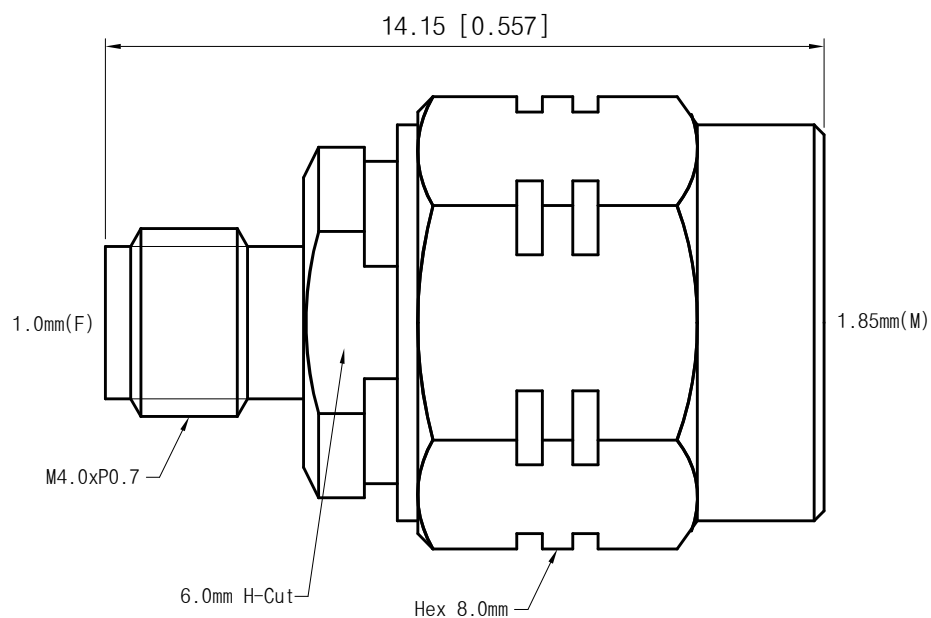

Title	1.0mm(F) to 1.85mm(M) Adapter
Part No.	AD00F01MS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale

N/A

Date

2020. 02. 04

Unit

mm[inch]

Drawn

Ter i K

withwave

Rev.

—