
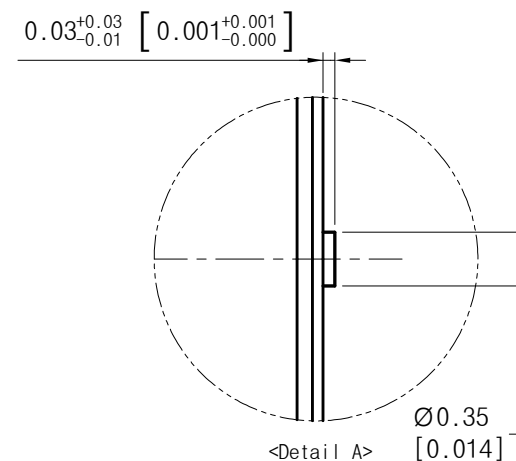


<Specification>

1. Electrical
 - 1-1. Impedance : 50Ω
 - 1-2. Frequency range : DC to 110GHz
2. Material
 - 2-1. Body : Stainless Steel(Passivated)
 - 2-2. Pin : BeCu(Au Plated)
 - 2-3. Insulator : Ultem1000
3. Mechanical
 - 3-1. Durability : 500 Cycles
4. Environmental
 - 1) Temp. Range : -65°C to +165°C
 - 2) RoHS Compliant

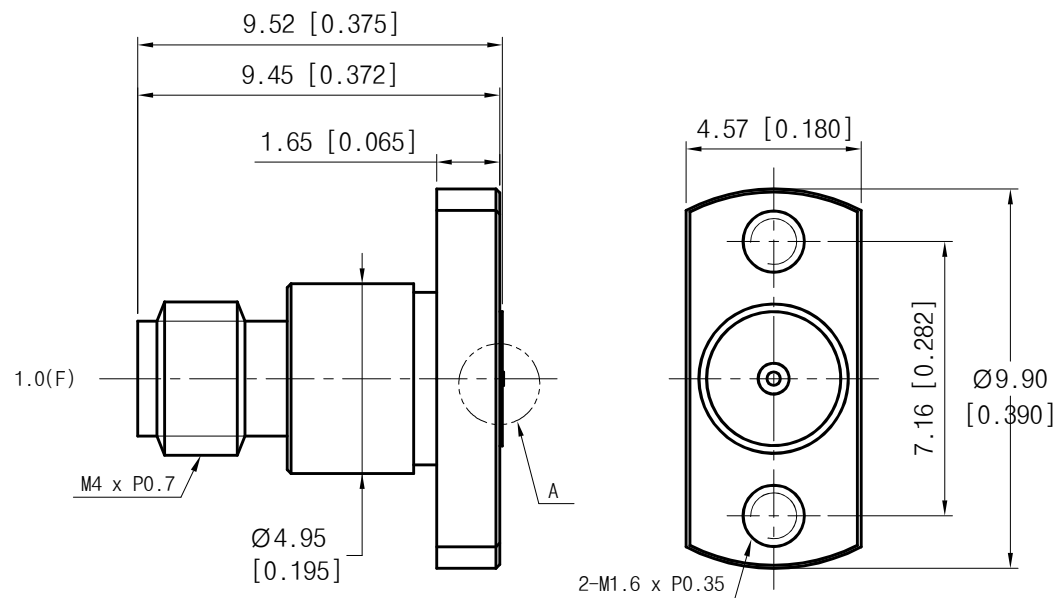

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2023. 12. 05
Unit	mm[inch]	Drawn	Teri K

Title	Vertical Launch 1.0mm(F) Connector for Stripline (PCB)
Part No.	VC00FS001

withwave

Rev.	—
------	---