

**WithWave's terminations** are composed of broadband, due to the coaxial construction, it offers a excellent performance specified from DC to 6 GHz  
Precision SMA coaxial connector interfaces ensure an good impedance match across wide bandwidth.

### ■ Features


- DC to 6 GHz
- VSWR : 1.2 : 1 (Max.)
- Power rating : 5 Watt
- Temperature range : -55 ~ +125 °C



### ■ Specification

Scope	Specification	TM06-03-02C
Electrical	Impedance(Ohm)	50
	Freq. range (GHz)	DC to 6
	VSWR	1.2 : 1 (Max)
	Power rating	5 Watt
	Connector	Brass with nickel plated
Material	Body	Aluminum Housing, Black Oxidized

### ■ Drawing

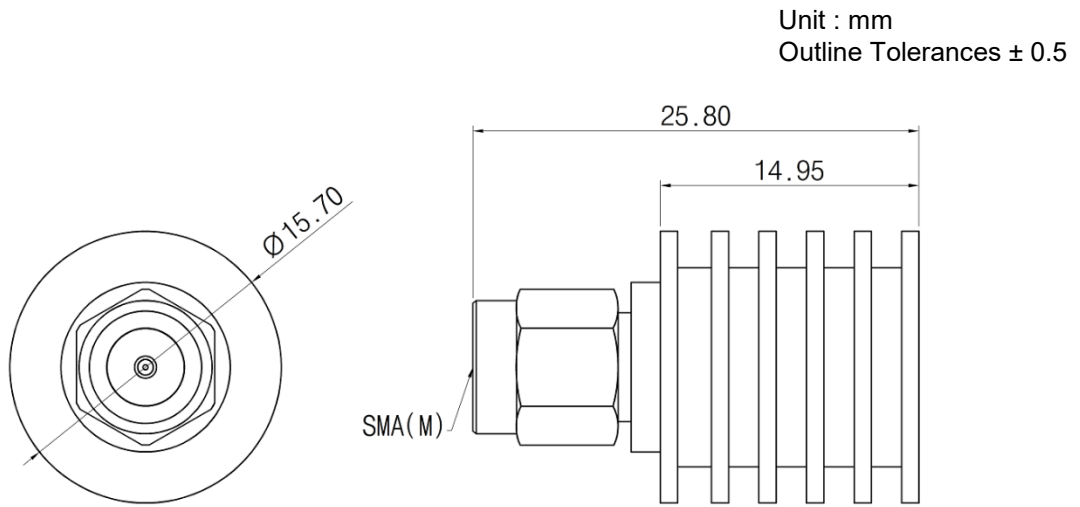

### ■ Measurement Result

