

A

B

C

D

E

F

## &lt;Specification&gt;

## 1. Electrical

1-1. Impedance : 50Ω

1-2. Frequency range : DC to 67GHz

1-3. VSWR(dB) : 1.2 : 1(-20.8dB)

## 2. Material

2-1. Body : Stainless Steel(STS303)

2-2. Pin : Brass(C3604)

2-3. Insulator : Ultem1000

2-4. Hex Nut : Stainless Steel(STS303)


## 3. Mechanical

3-1. Durability : 500 Cycles

## 4. Environmental

1) Temp. Range : -40℃ to +125℃

2) RoHS Compliant

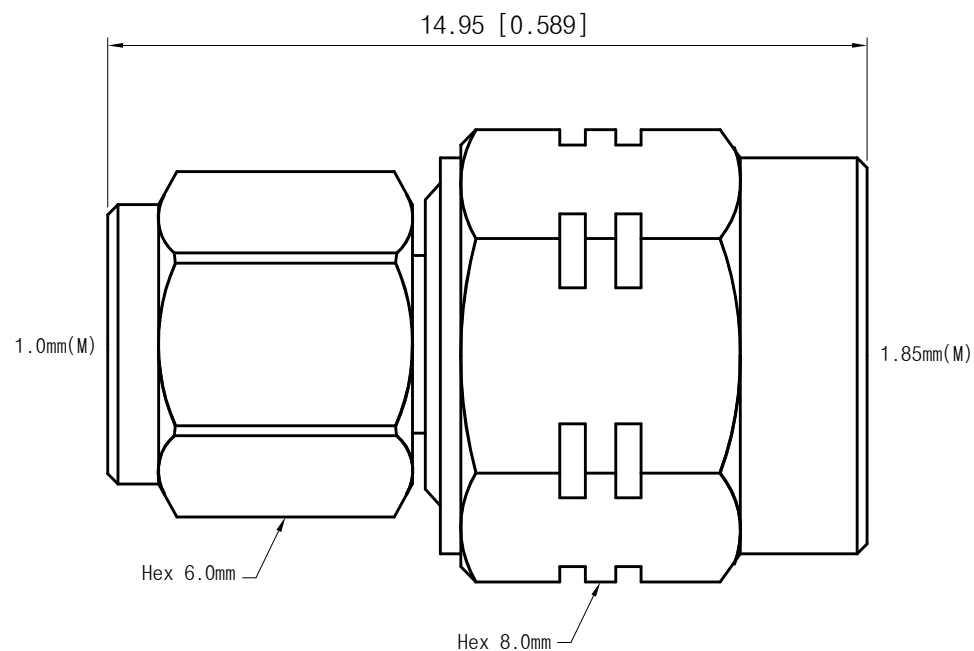

Title 1.0mm(M) to 1.85mm(M) Adapter

Part No. AD00M01MS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale

N/A

Date

2020. 02. 04

Unit

mm[inch]

Drawn

Ter i K

**withwave**

Rev.

—