

A

B

C

D

E

F

## &lt;Specification&gt;

## 1. Electrical

- 1-1. Impedance : 50Ω
- 1-2. Frequency range : DC to 50GHz
- 1-3. VSWR(dB) : 1.3 : 1(-17.69dB)

## 2. Material


- 2-1. Body : Stainless Steel(STS303)
- 2-2. Pin : Brass(C3604)
- 2-3. Insulator : Ultem1000
- 2-4. Hex Nut : Stainless Steel(STS303)

## 3. Mechanical

- 3-1. Durability : 500 Cycles

## 4. Environmental

- 1) Temp. Range : -40℃ to +125℃
- 2) RoHS Compliant

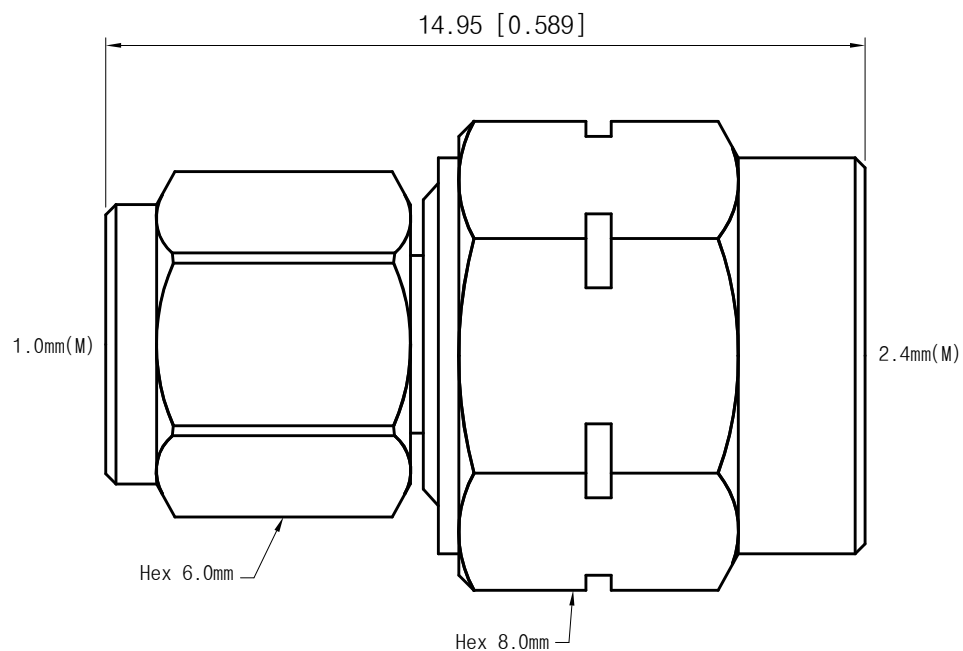

Title	1.0mm(M) to 2.4mm(M) Adapter
Part No.	AD00M02MS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale

N/A

Date

2022. 07. 28

Unit

mm[inch]

Drawn

Ter i K

**withwave**

Rev.

-

A

B

C

D

E

F