
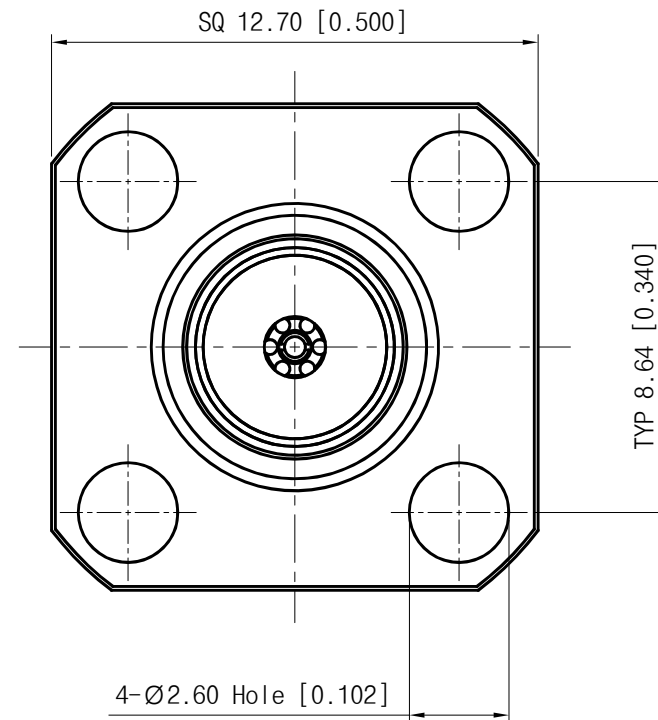


<Specification>

1. Electrical
  - 1-1. Impedance : 50Ω
  - 1-2. Frequency range : DC to 67GHz
  - 1-3. VSWR(dB) : 1.3 : 1(-17.69dB)
2. Material
  - 2-1. Body : Stainless Steel(STS303)  
Passivated, ASTM A380
  - 2-2. Pin : BeCu(C1720)  
Au Plated over Nickel  
MIL-G-45204
  - 2-3. Insulator : Ultem1000
3. Mechanical
  - 3-1. Durability : 500 Cycles

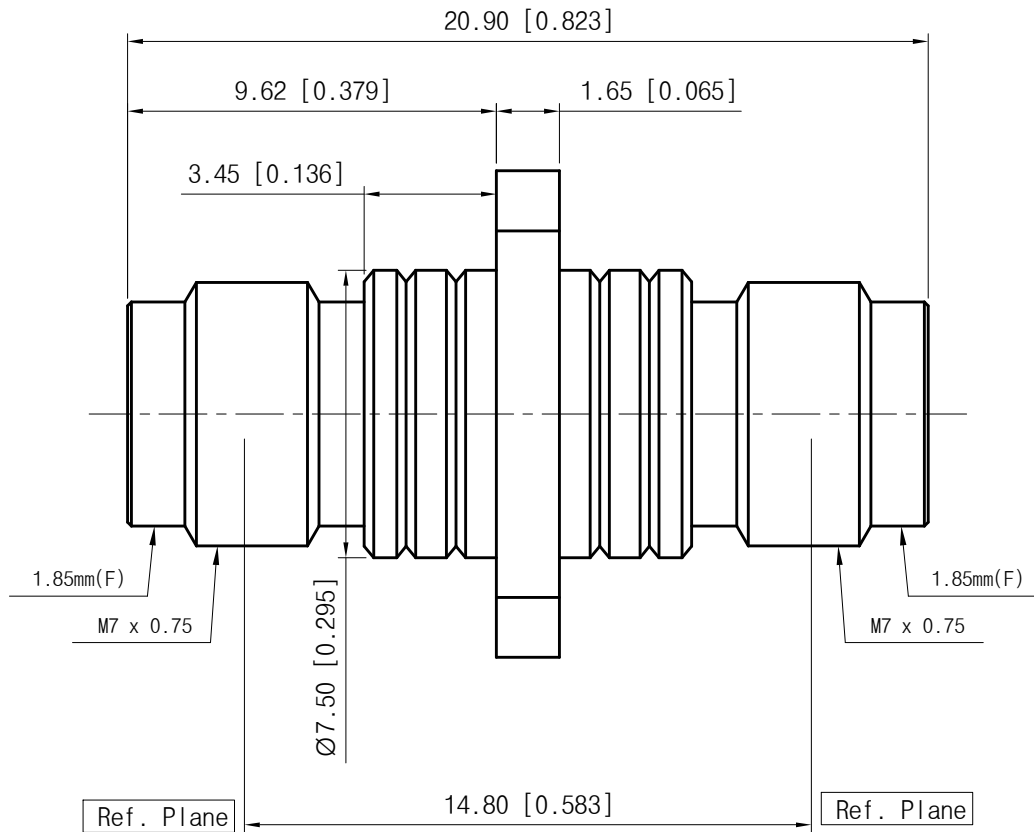

Title	1.85mm(F) to 1.85mm(F) 4Hole Flange Adapter
Part No.	AD01F01FS3

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2019. 04. 20
Unit	mm[inch]	Drawn	Ter i K

**withwave**

Rev.  
—