

A

B

C


D

E

F

<Specification>

- 1. Electrical
  - 1) Impedance : 50Ω
  - 2) Frequency range : DC to 67GHz
  - 3) VSWR(dB) : 1.3 : 1(-17.69dB)
- 2. Material
  - 2-1. Body01 : Stainless Steel(STS303)
  - 2-2. Body02 : BeCu(C17300)
  - 2-3. Pin : BeCu(C17300)
  - 2-4. Insulator : Uitem1000
- 3. Mechanical (Durability)
  - 3-1. Smooth Bore : 500 cycles
  - 3-2. Full Detent : 100 cycles
- 4. Environmental
  - 1) Temp. Range : -65°C to +165°C
  - 2) RoHS Compliant

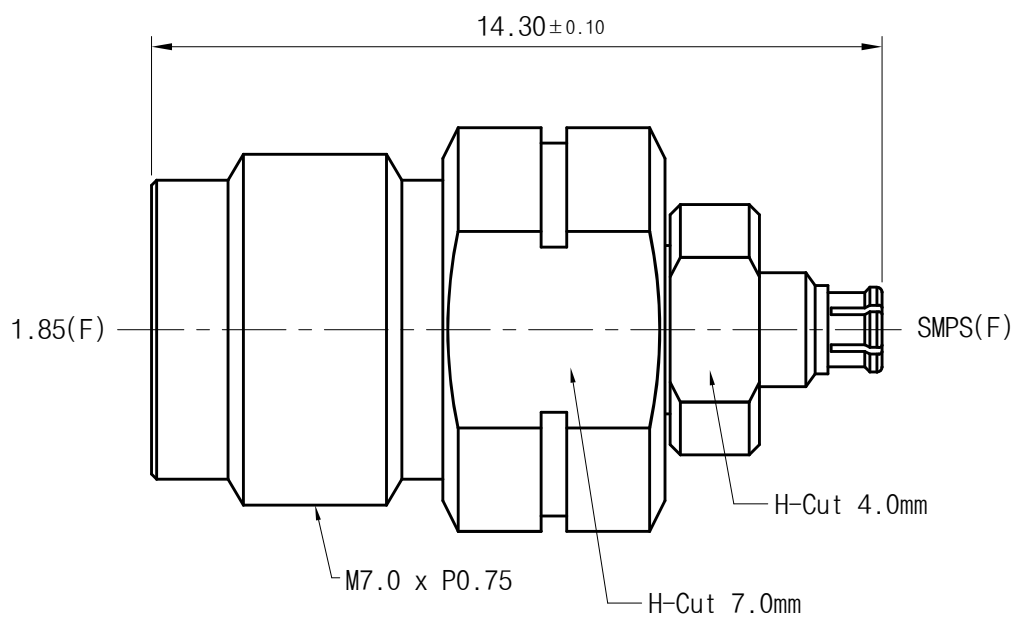

Title	1.85(F) to SMPS(F) Adapter
Part No.	AD01F25FS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2025. 02. 05
Unit	mm[inch]	Drawn	Ter i K

**withwave** Rev. —

A

B

C

D

E

F