

A

B

C


D

E

F

<Specification>

- 1. Electrical
 - 1) Impedance : 50Ω
 - 2) Frequency range : DC to 67GHz
 - 3) VSWR(dB) : 1.3 : 1(-17.69dB)
- 2. Material
 - 2-1. Body : Stainless Steel(STS303)
 - 2-2. Pin : BeCu(C17300)
 - 2-3. Insulator : Ultem1000
- 3. Mechanical
 - 3-1. Durability : 500 Cycles
- 4. Environmental
 - 1) Temp. Range : -65°C to +165°C
 - 2) RoHS Compliant

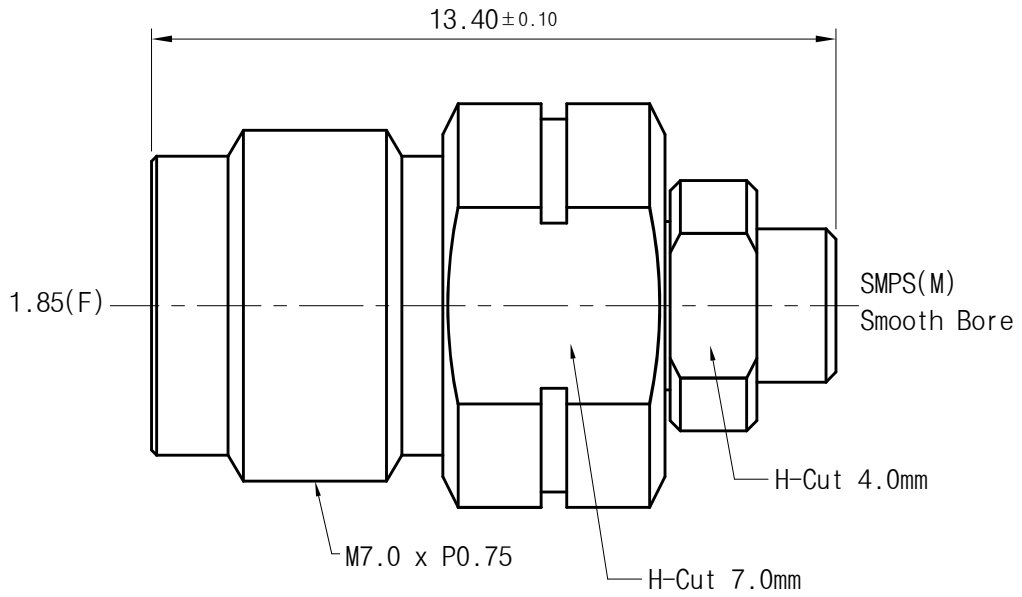

Title	1.85(F) to SMPS(M) Adapter
Part No.	AD01F25MS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2025. 02. 05
Unit	mm[inch]	Drawn	Teri K

withwave	Rev.	—
-----------------	------	---

A

B

C

D

E

F