

# <Specification>

## 1. Electrical


- 1-1. Impedance :  $50\Omega$
- 1-2. Frequency range : DC to 40GHz
- 1-3. VSWR(dB) : 1.25 : 1(-19.08dB)

## 2. Material

- 2-1. Body : Stainless Steel(STS 303)
- 2-2. Pin : Brass(C3604)
- 2-3. Insulator : Ultem1000
- 2-4. Coupling Nut : Stainless Steel(STS 303)

## 3. Mechanical

- 3-1. Durability : 500 Cycles

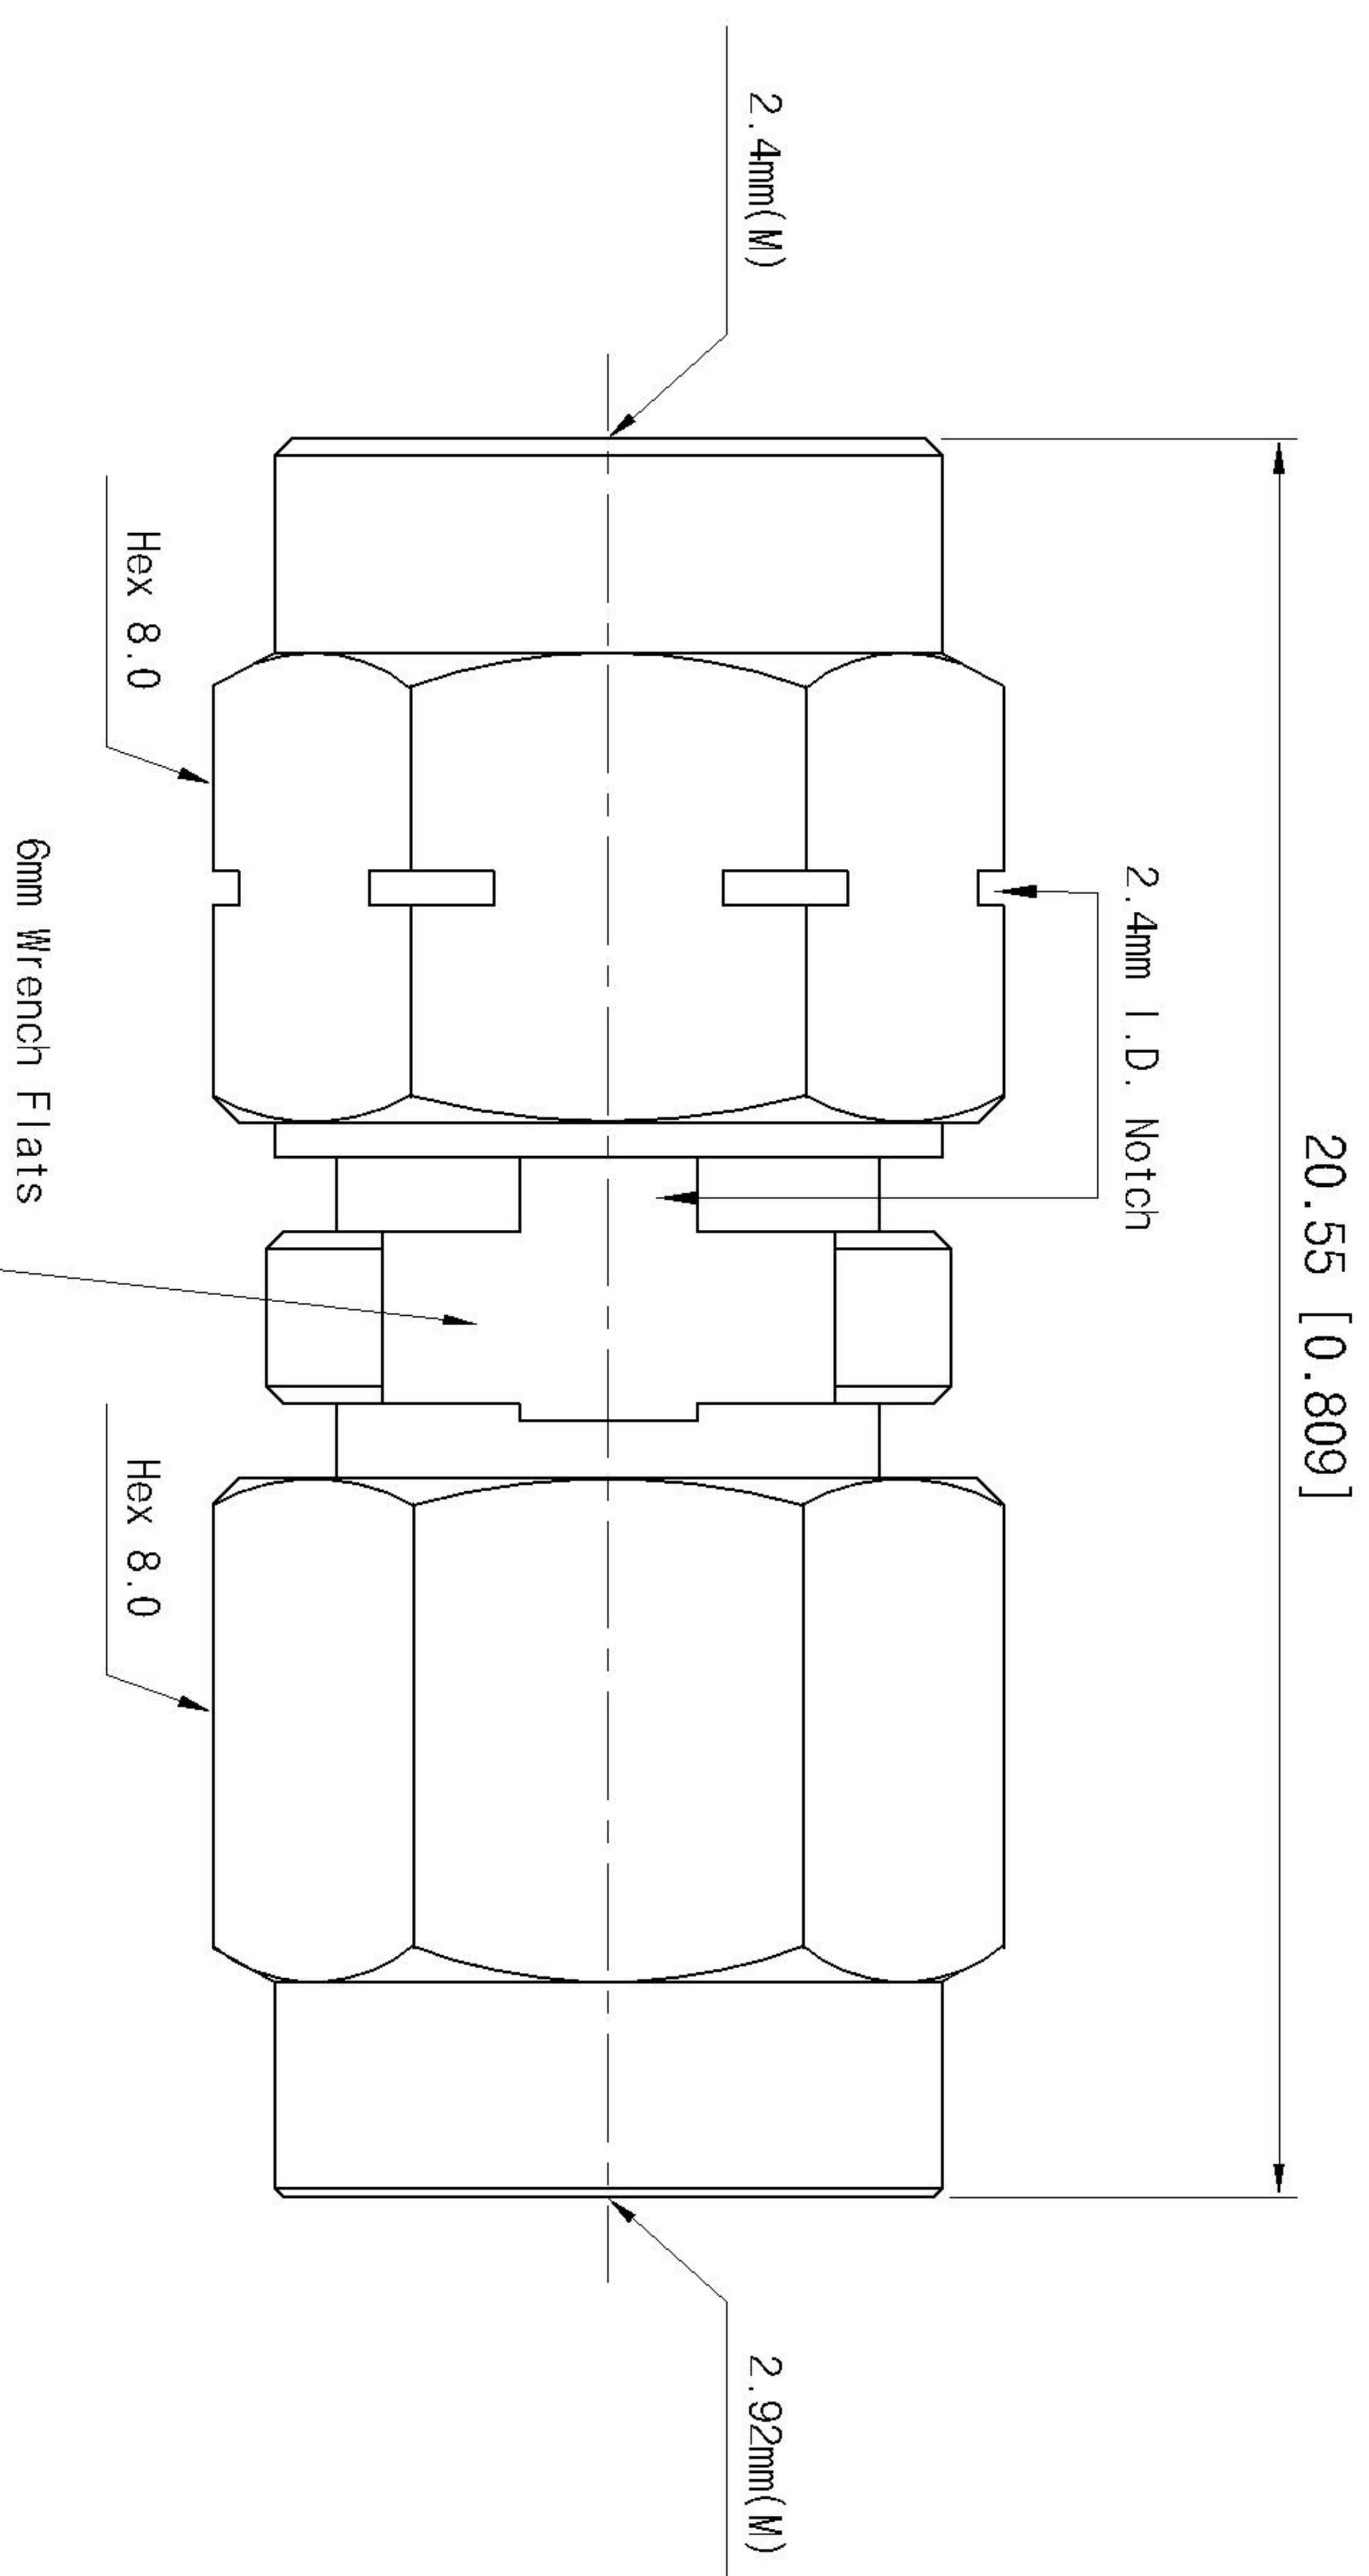

Title	2.4mm(M) to 2.92mm(M) Adapter	
Part No.	AD02M03MS1	

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2015. 04. 22
Unit	mm[Inch]	Drawn	DJ Kim

**withwave**

Rev.  
—