


A B C D E F

<Specification>

1. Material & Finish
  - 1) Body : SUS303, Passivated
  - 2) Pin : Brass(C3604), Gold Plated
  - 3) Insulator : Ultem 1000
2. Electrical
  - 1) Impedance : 50Ω
  - 2) Frequency range : DC to 50GHz
  - 3) VSWR : 1.2 : 1 (DC to 40GHz)  
1.4 : 1 (40 to 50GHz)
3. Mechanical
  - 1) Force to Engage & Disengage
    - Full Detent : 4.5 / 6.5 lbs
  - 2) Axial misalignment : 0.005"  
Radial misalignment : ±0.01"
  - 3) Mating cycles
    - Smooth Bore : 500
    - Full Detent : 100
4. RoHS free

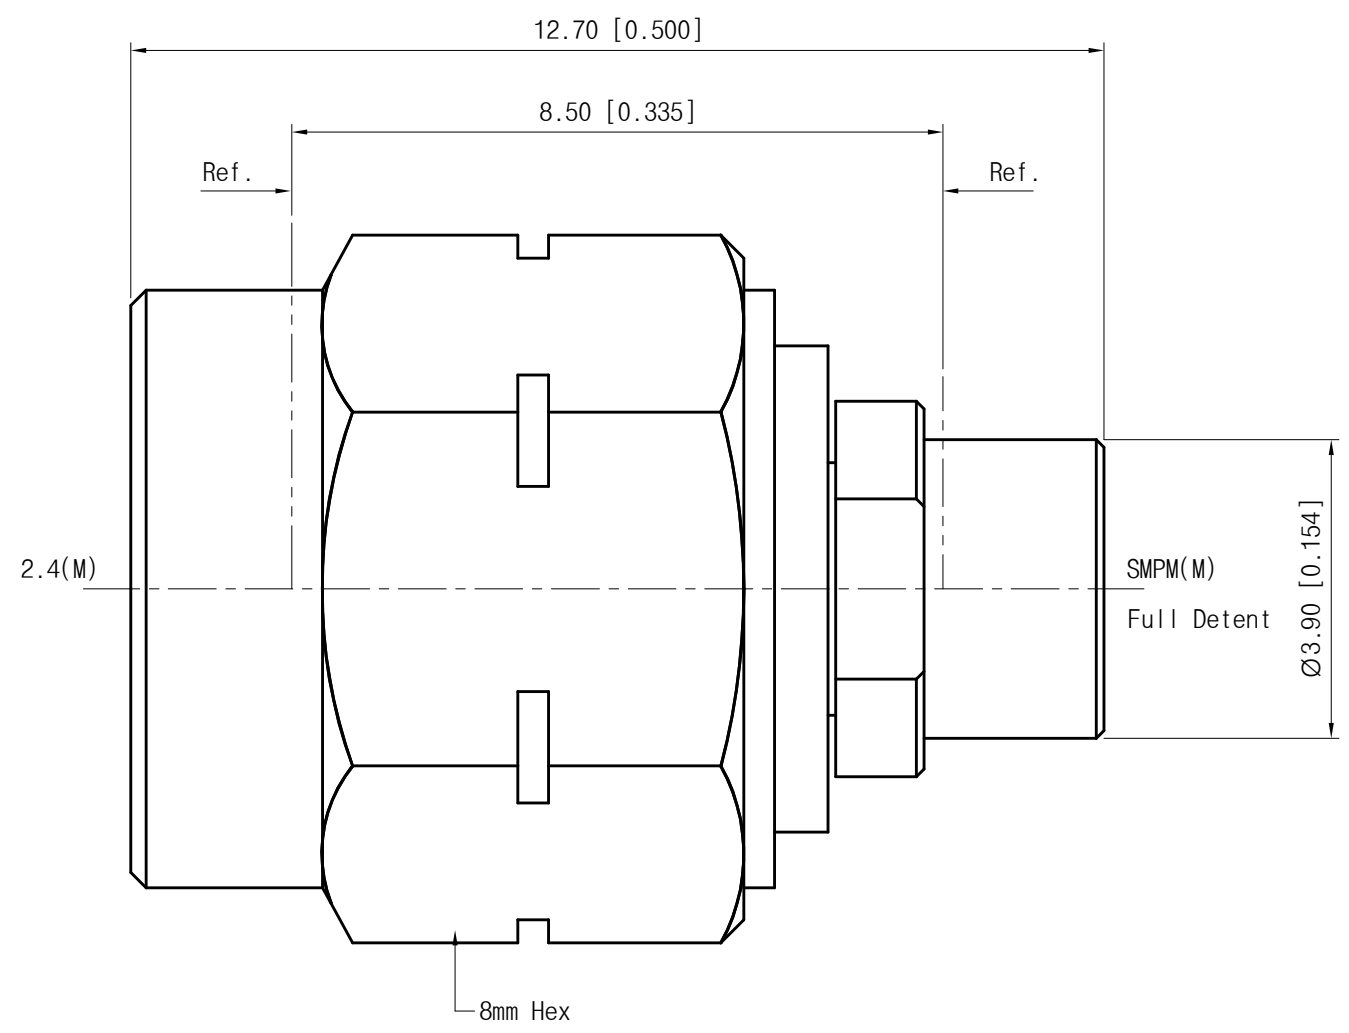

Title	2.4(M) to SMPM(M) Adapter
Part No.	AD02M17MS1

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2021. 03. 17
Unit	mm[inch]	Drawn	Teri K

<b>withwave</b>	Rev.	-
-----------------	------	---

A B C D E F