

A

B

C


D

E

F

<Specification>

1. Material & Finish
 - 1) Body : SUS303, Passivated
 - 2) Pin : BeCu(C17300), Gold Plated
 - 3) Insulator : Ultem 1000
2. Electrical
 - 1) Impedance : $50\ \Omega$
 - 2) Frequency range : DC to 40GHz
 - 3) VSWR : 1.2 : 1 (DC to 40GHz)
3. Mechanical
 - 1) Force to Engage & Disengage
 - Full Detent : 4.5 / 6.5 lbs
 - 2) Axial misalignment : 0.005"
Radial misalignment : ± 0.01 "
 - 3) Mating cycles
 - Smooth Bore : 500
 - Full Detent : 100
4. RoHS free

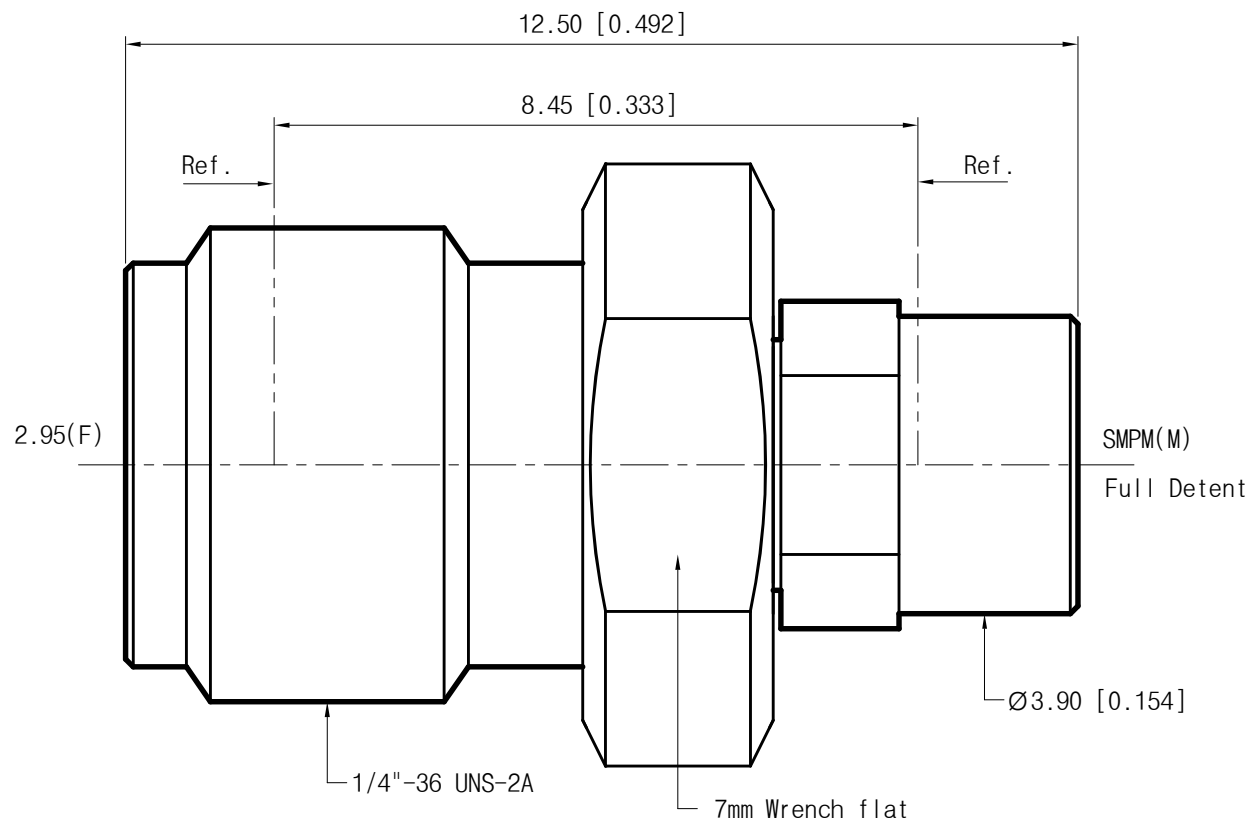

Title	2.92(F) to SMPM(M) Adapter		
Part No.	AD03F17MS1		
Scale	N/A	Date	2021. 01. 14
Unit	mm[inch]	Drawn	Ter i K
withwave			Rev. -

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

A

B

C

D

E

F