


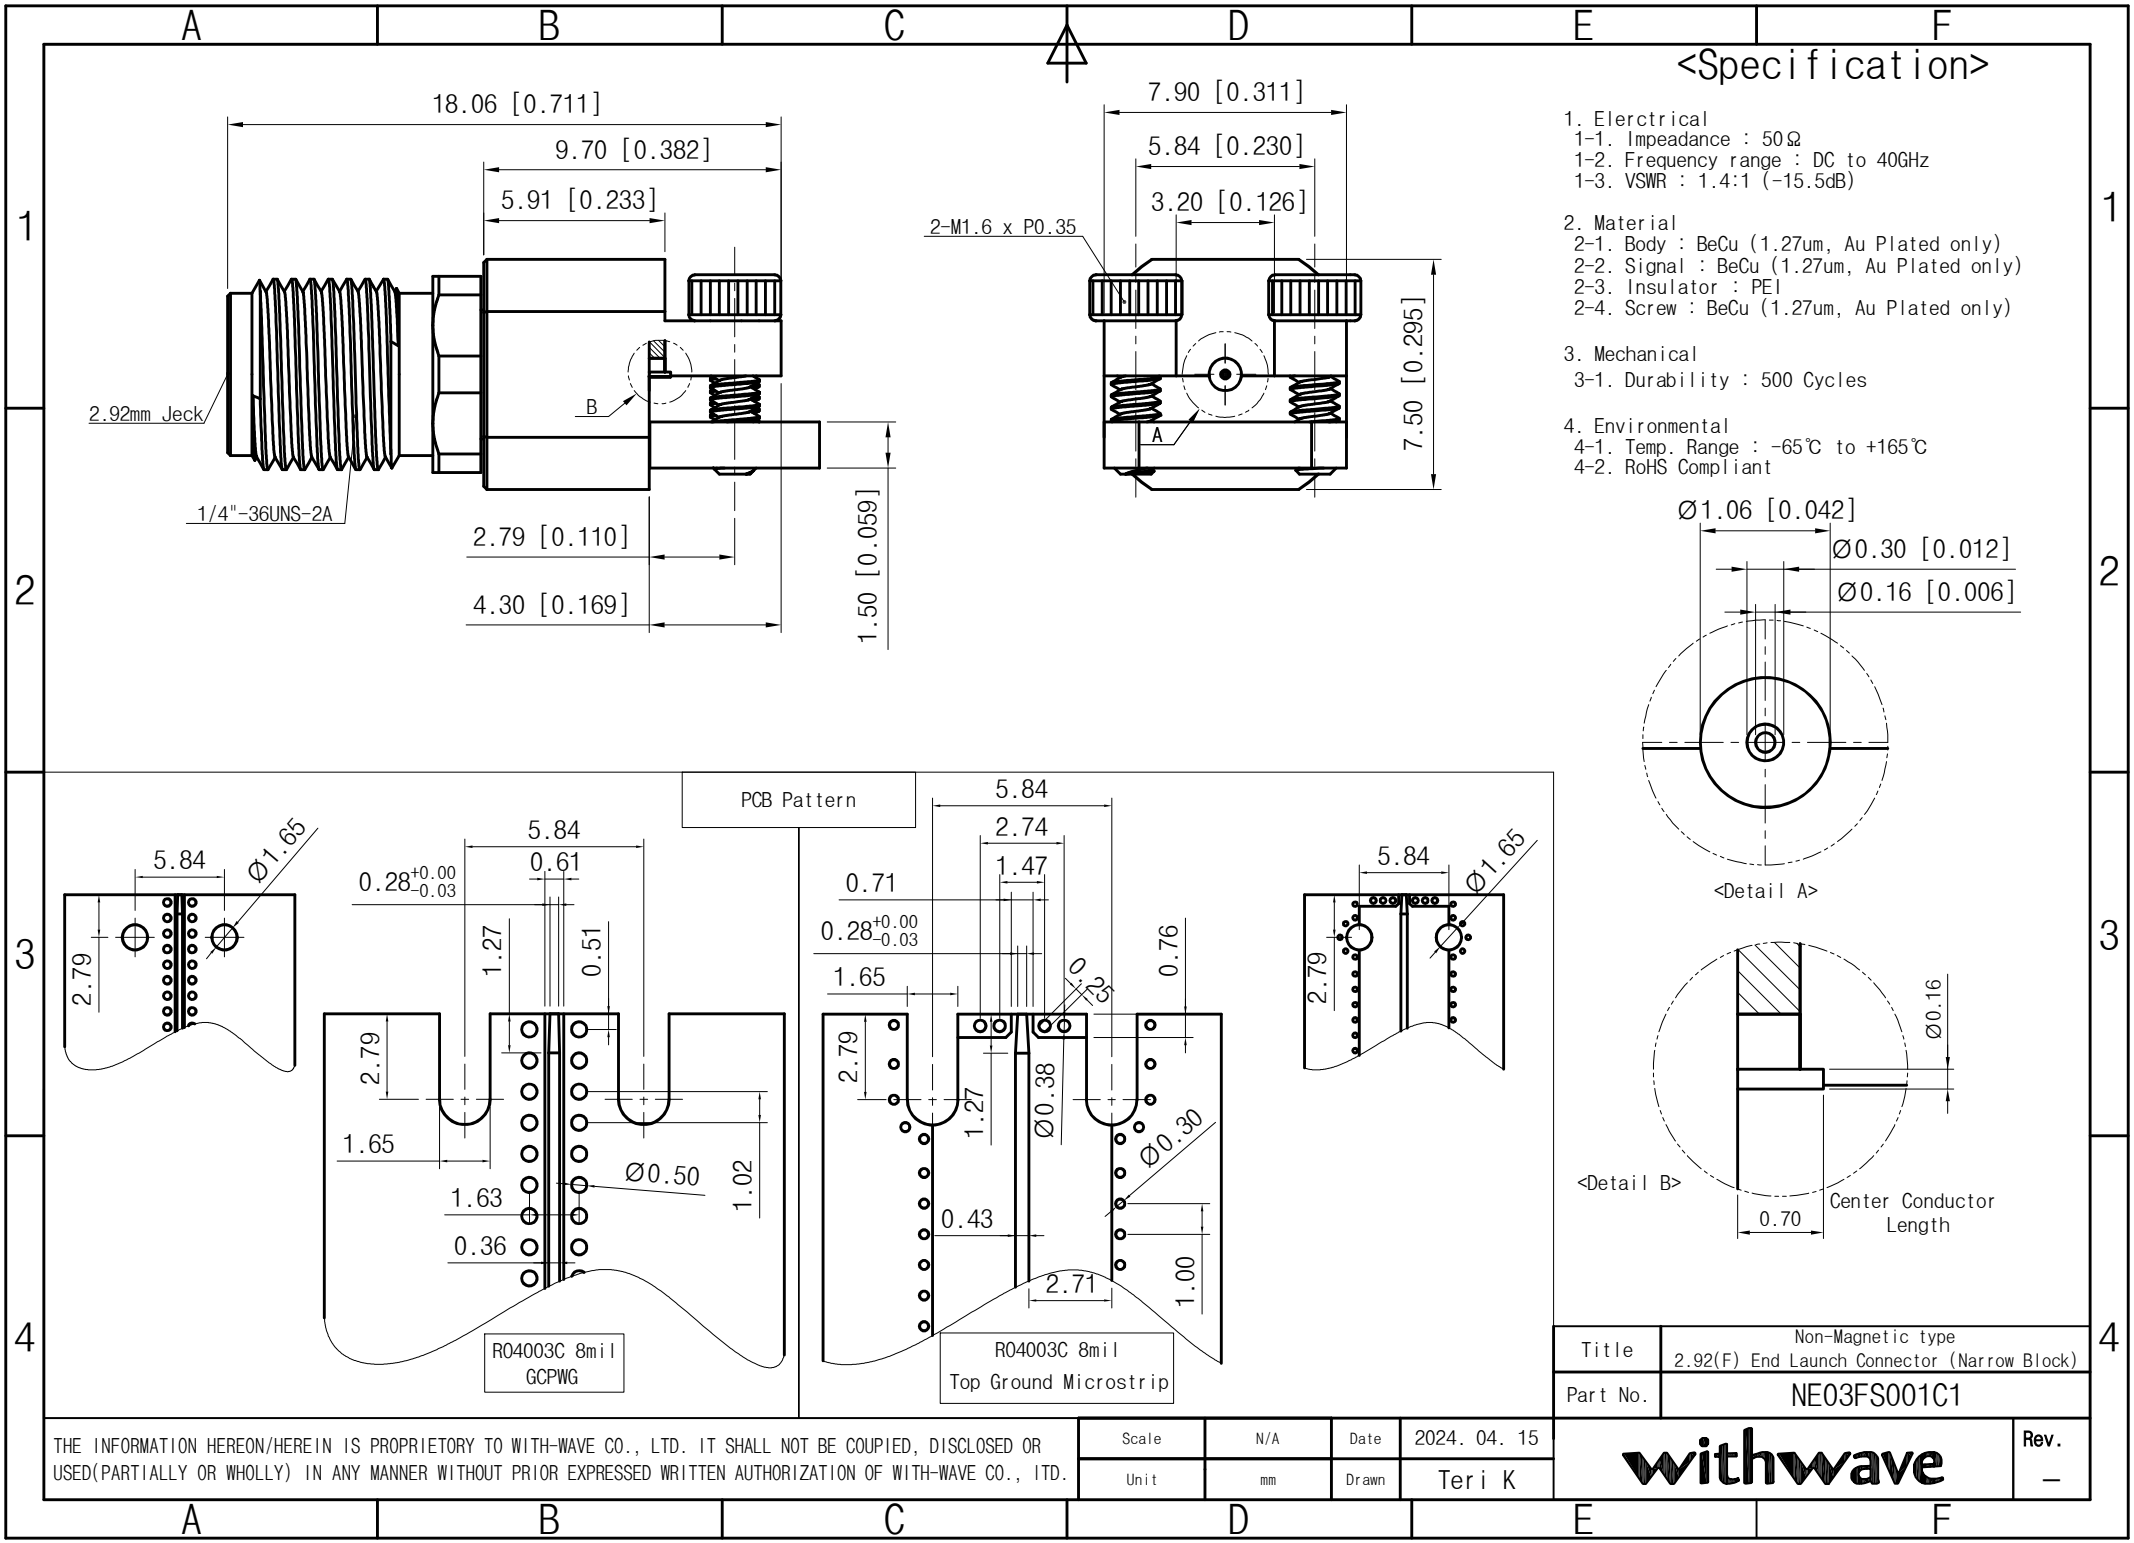

<Specification>

- 1. Electrical
 - 1-1. Impedance : 50Ω
 - 1-2. Frequency range : DC to 40GHz
 - 1-3. VSWR : 1.4:1 (-15.5dB)
- 2. Material
 - 2-1. Body : BeCu (1.27um, Au Plated only)
 - 2-2. Signal : BeCu (1.27um, Au Plated only)
 - 2-3. Insulator : PEI
 - 2-4. Screw : BeCu (1.27um, Au Plated only)
- 3. Mechanical
 - 3-1. Durability : 500 Cycles
- 4. Environmental
 - 4-1. Temp. Range : -65°C to +165°C
 - 4-2. RoHS Compliant

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2024. 04. 15
Unit	mm	Drawn	Teri K

Title	Non-Magnetic type 2.92(F) End Launch Connector (Narrow Block)
Part No.	NE03FS001C1

withwave

Rev.
—