

<Specification>

1. Material


- 1) Body : Stainless Steel (Passivated)
- 2) Center Conductor : BeCu (Au Plated)
- 3) Insulator : PEI

2. Electrical

- 1) Impedance : 50Ω
- 2) Frequency range : DC to 40GHz
- 3) VSWR : 1.15 : 1 (DC to 18GHz)
1.25 : 1 (18 to 40GHz)

Equivalent model

- 1) Southwest Microwave P/N : 1013-05SF

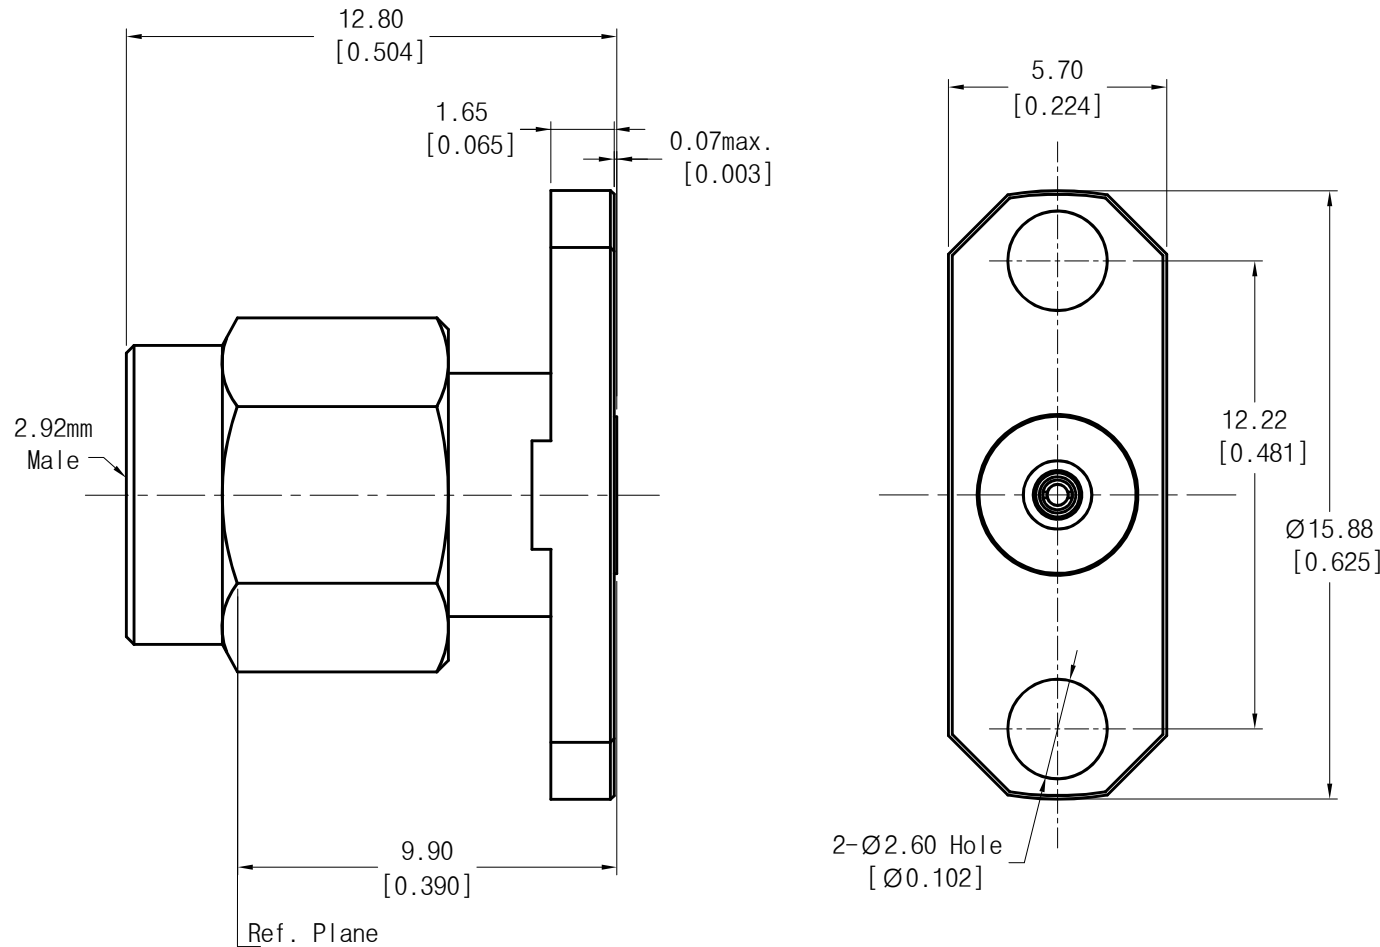

Launch Pin Diameter	Max. Pin Depth
0.503mm[0.02"]	1.6mm[0.063"]

Tolerance	Dimension	Range	Angle	Date	2015. 12. 07	Title	2.92mm(M) Panel Mount 2Hole 0.625" 0.020" Pin Accept Type Conn.		
	0	±0.1	±2.0°	Approved	..		Part No.	PM03MS040	
	0.X	±0.05	±1.0°	Checked	.			Rev.	—
0.XX	±0.03		Drawn	Teri K					
Scale		Unit	mm						

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.