



<Specification>

1. Material
 - 1) Body : Stainless Steel (Passivated)
 - 2) Center Conductor : BeCu (Au Plated)
 - 3) Insulator : PTFE
2. Electrical
 - 1) Impedance : 50Ω
 - 2) Frequency range : DC to 27GHz

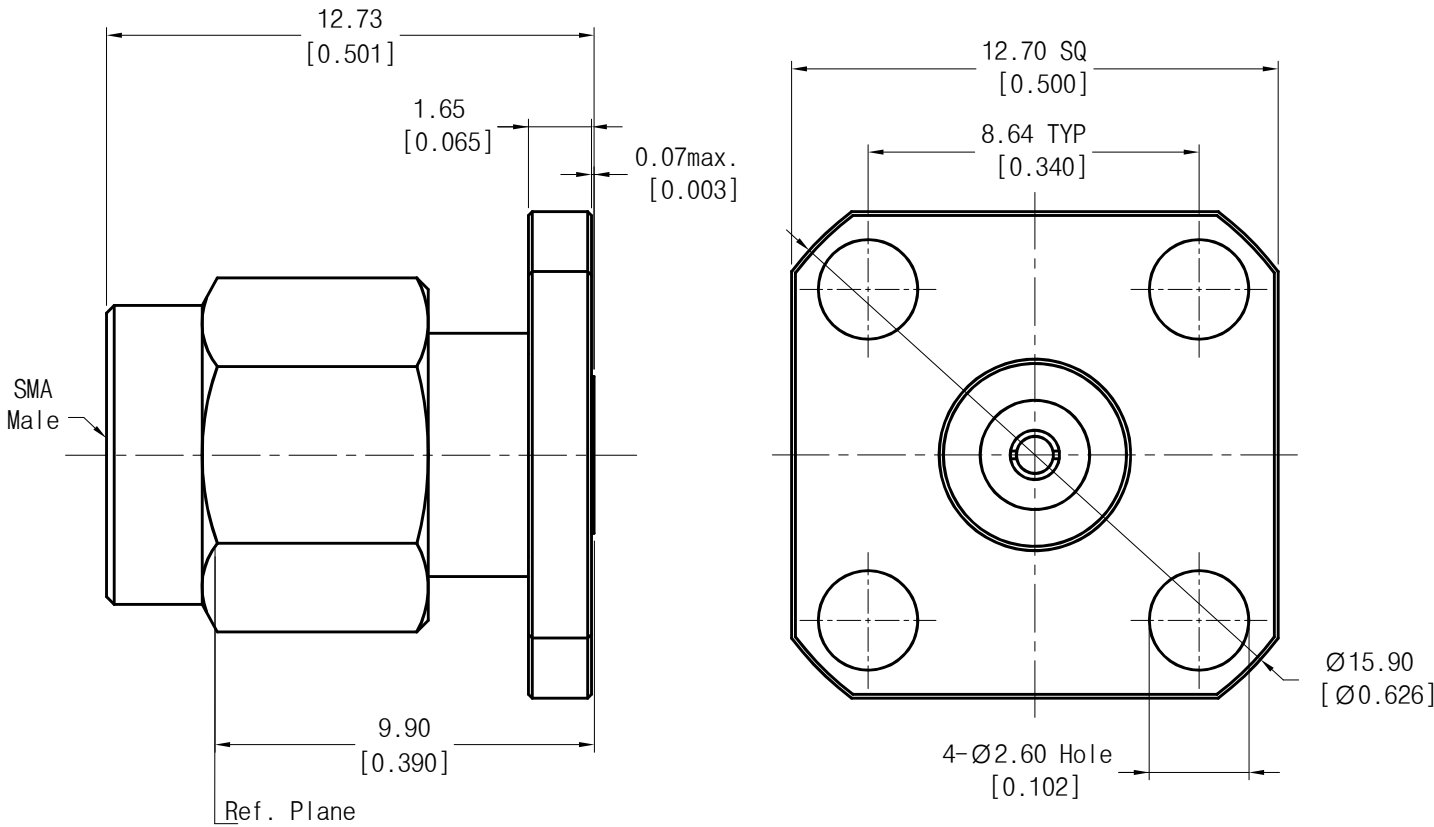

Launch Pin Diameter	Max. Pin Depth
0.915mm[0.036"]	2.54mm[0.100"]

Dimension	Range	Angle	Date	2016. 02. 17	Title	SMA(M) Panel Mount 4Hole 0.500"SQ 0.036" Pin Accept Type Conn.	
0	±0.1	±2.0°	Approved	..	Part No.	PM06MS035	
0.X	±0.05	±1.0°	Checked	.			
0.XX	±0.03		Drawn	Teri K			
Scale	Unit	mm					

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.