

<Specification>


1. Material
- 1) Body : Brass (Au Pated)
 - 2) Center Conductor : BeCu (Au Plated)
 - 3) Insulator : PTFE

2. Electrical
- 1) Impedance : 50Ω
 - 2) Frequency range : DC to 26GHz
 - 3) VSWR : 1.2 : 1

3. Mechanical
- 1) Durability : 500 Cycles

4. Environmental
- 1) Temp. Range : -40℃ to +125℃
 - 2) RoHS Compliant

5. unit : mm[inch]

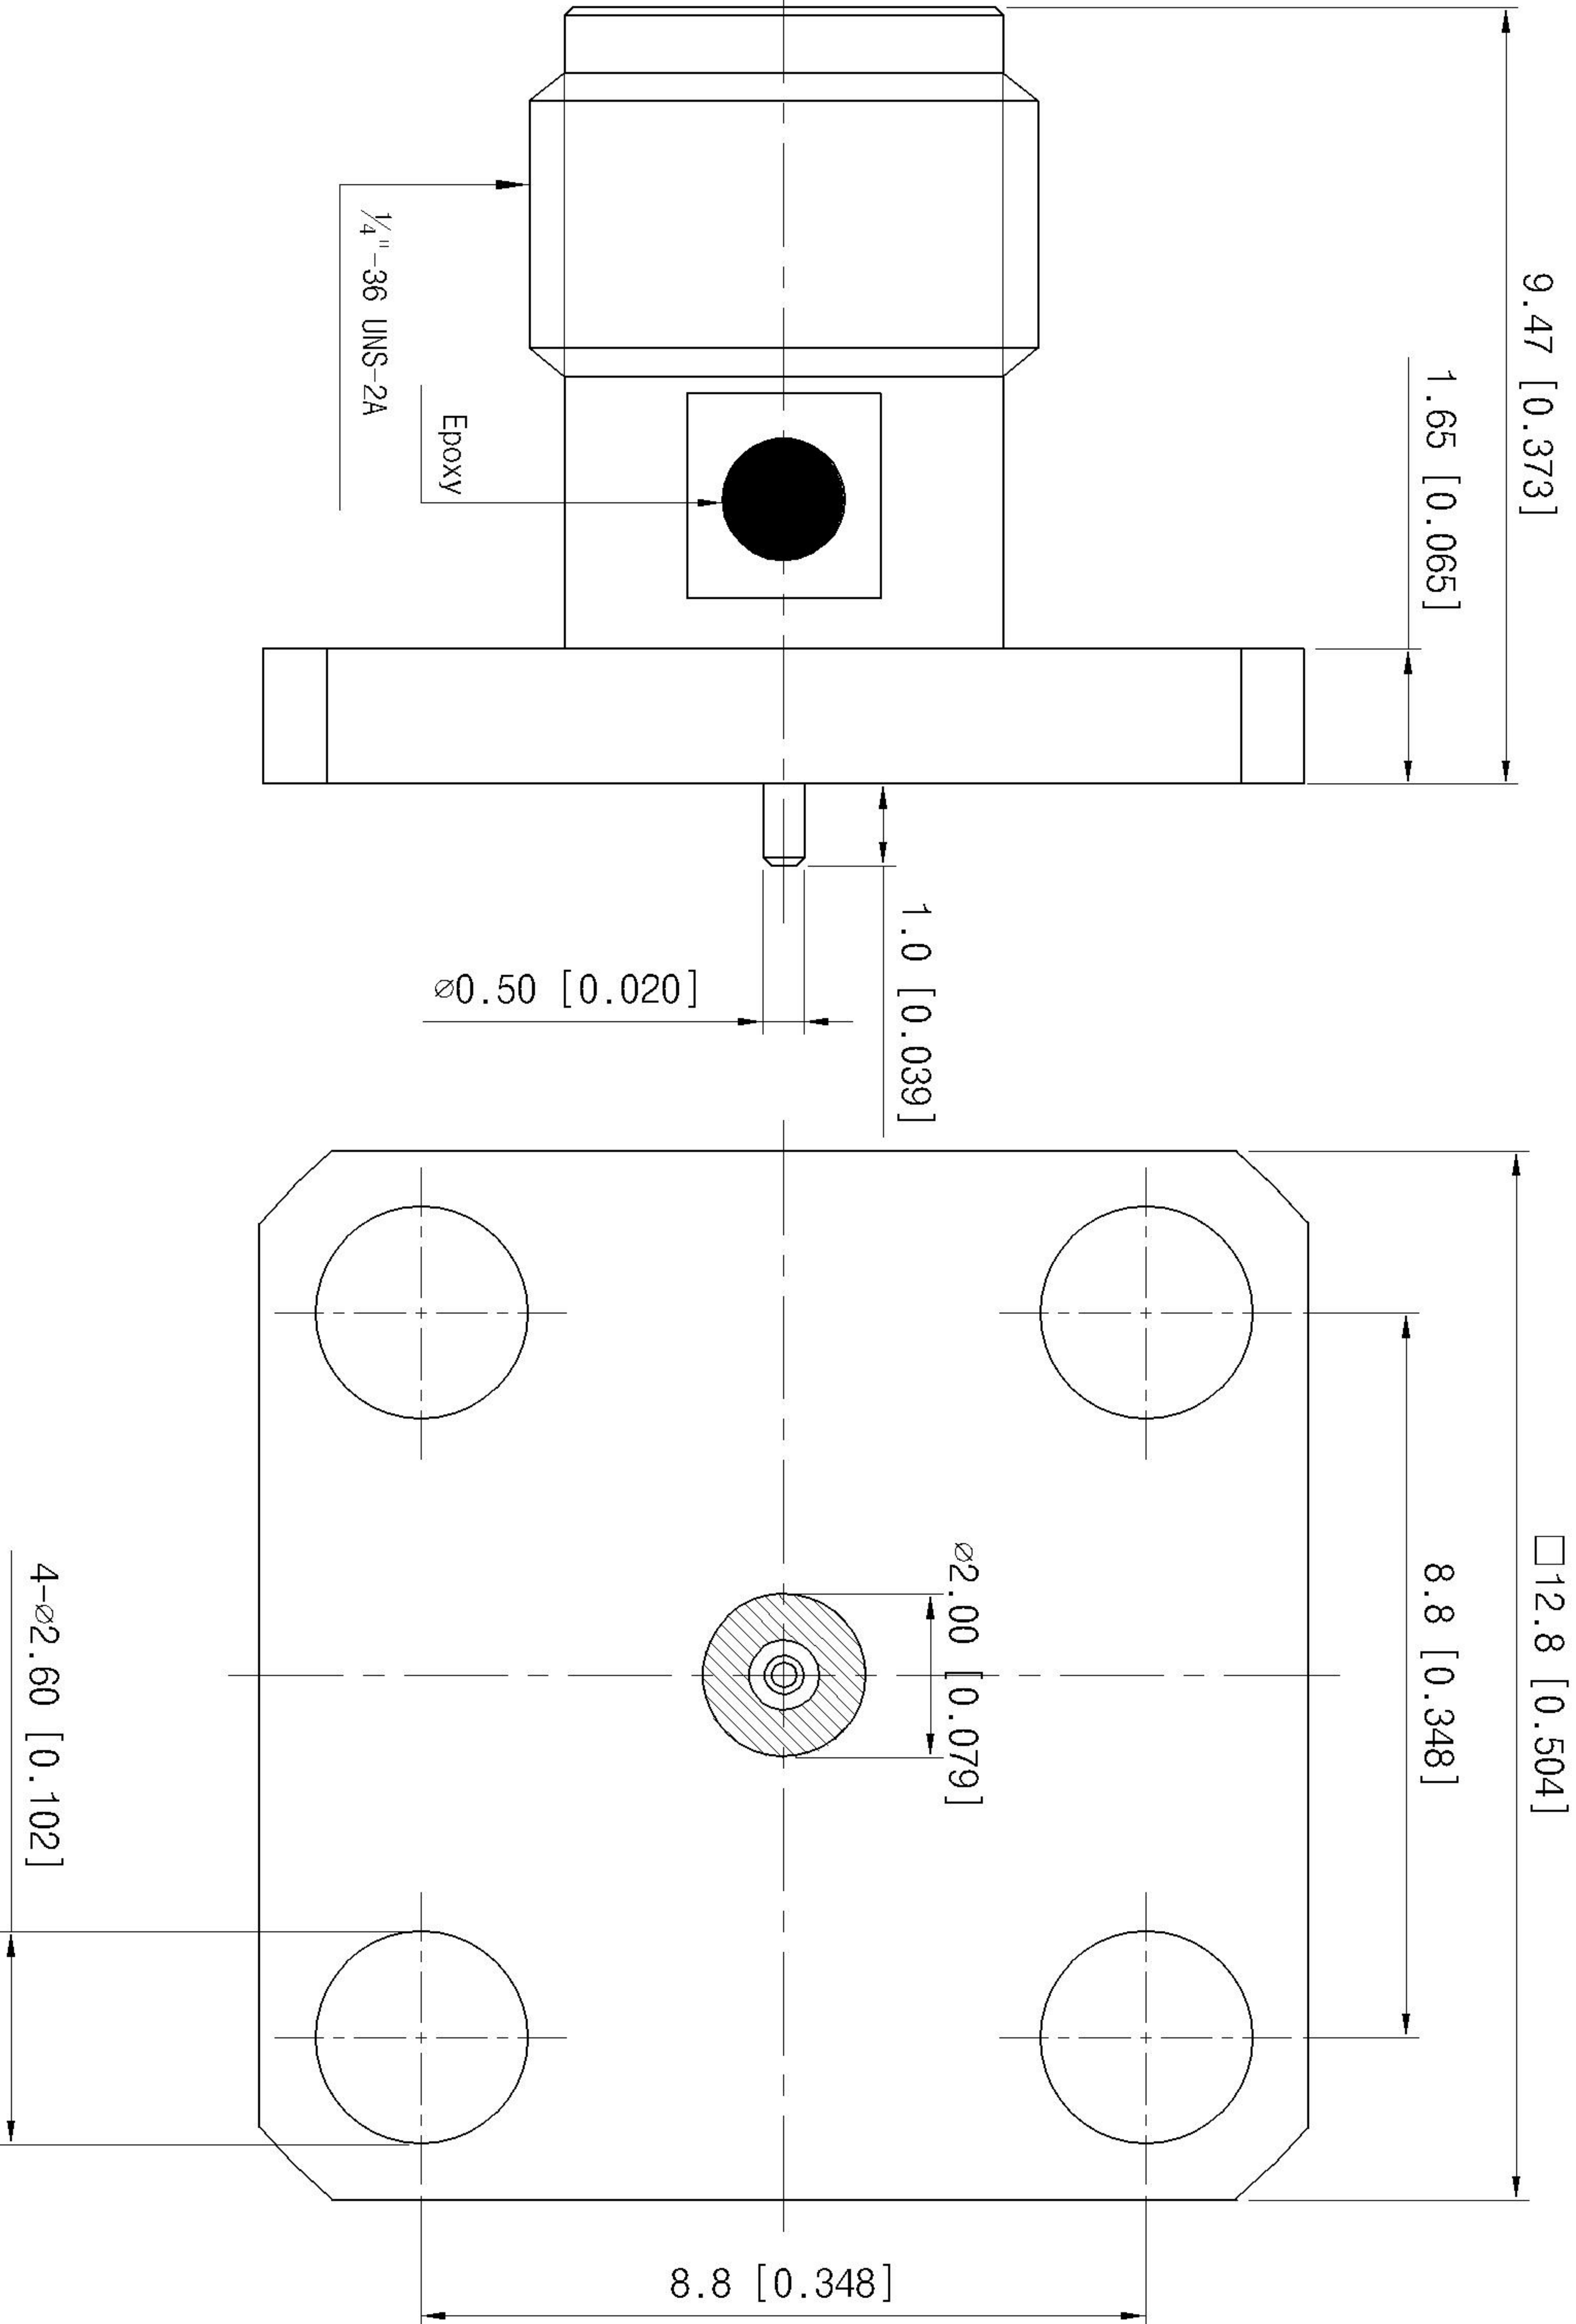

THE INFORMATION HEREON/HEREIN IS PROPRIETORY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Dimension		Range	Angle	Date		Title	
Tolerance	0	±0.1	±2.0°	Approved	2016. 09. 19	Part No.	SMA(F) Panel Mount Connector
	0.X	±0.05		Checked	BWSong	SM06FS064	
	0.XX	±0.03	±1.0°		MYLee		
Scale		Unit	mm	Drawn	DJKim	Rev.	