<Specification>

1. Elerctrical
 1-1. Impeadance : 50Ω
 1-2. Frequency range : DC to 67GHz
 1-3. VSWR : 1.4:1

2. Material
 2-1. Body : Stainless Steel(Passivated)
 2-2. Pin : Brass(Au Plated)
 2-3. Insulator : Ultem1000
 2-4. Coupling Nut : Stainless Steel(Passivated)
 2-5. C-ring : Stainless Steel(Passivated)

3. Mechanical
 3-1. Durability : 500 Cycles

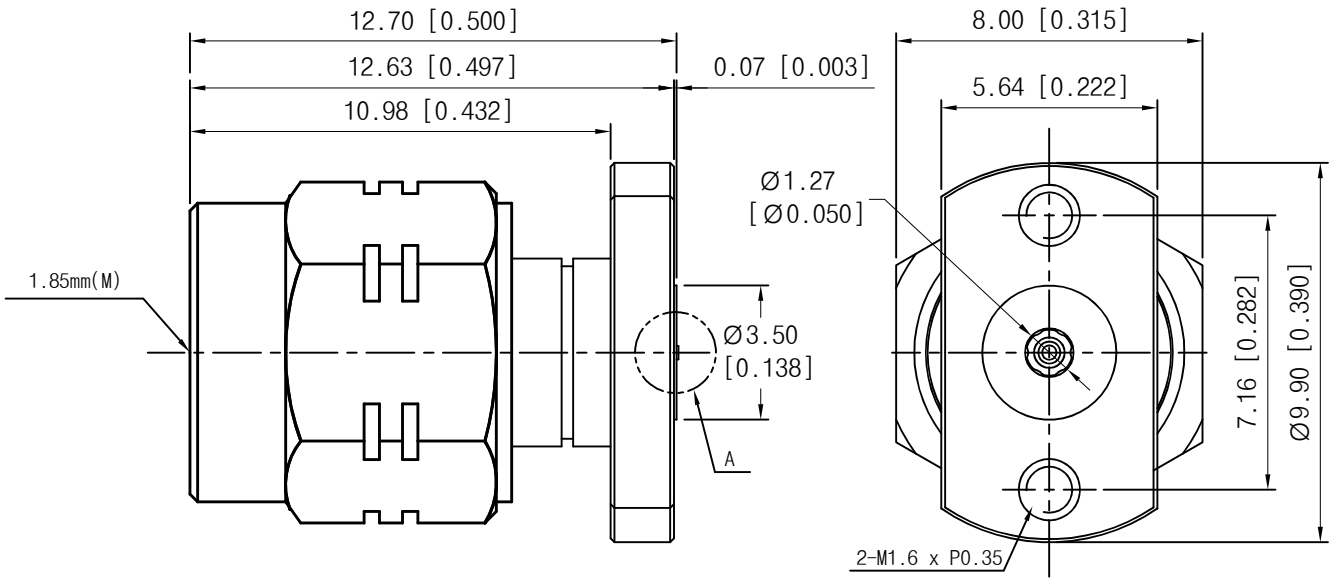

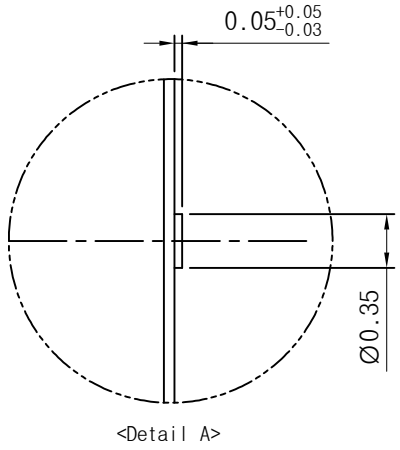

<Detail A>

Recommended
Top PCB Pattern

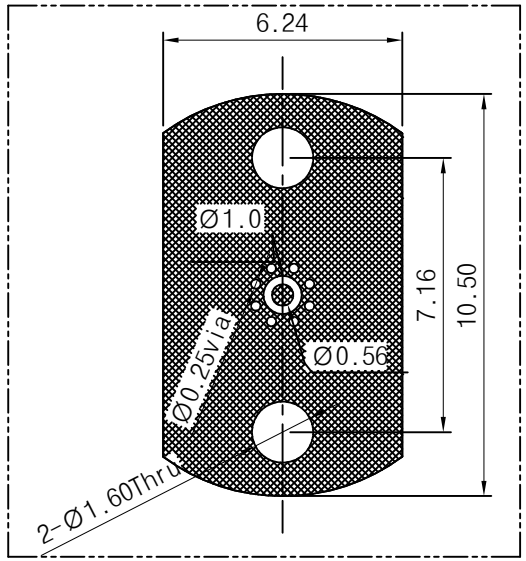

* PCB : R04003C 8mil

Title	Vertical Launch 1.85mm(M) Connector for Stripline R04003C 8mil(PCB)
Part No.	VC01MS001

THE INFORMATION HEREON/HEREIN IS PROPRIETORY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., ITD.

Scale	N/A	Date	2019. 02. 14
Unit	mm[inch]	Drawn	Teri K

withwave

Rev. –