



<Specification>

- Electrical
 - Impedance : 50Ω
 - Frequency range : DC to 67GHz
 - VSWR : 1.4:1
- Material
 - Body : Stainless Steel(Passivated)
 - Pin : Brass(Au Plated)
 - Insulator : Ultem1000
 - Coupling Nut : Stainless Steel(Passivated)
 - C-ring : Stainless Steel(Passivated)
- Mechanical
 - Durability : 500 Cycles

Recommended Bottom PCB Pattern

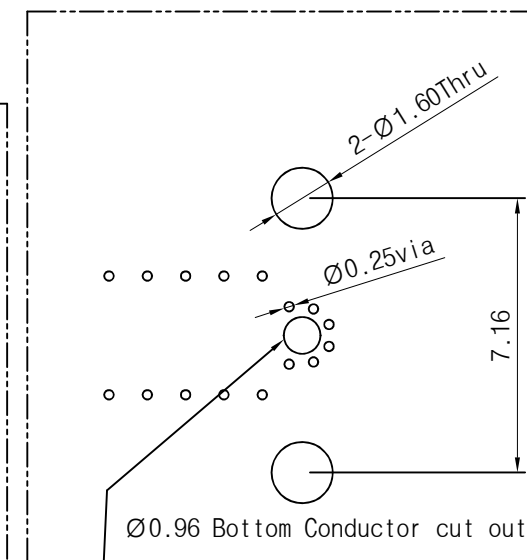


Recommended Top PCB Pattern

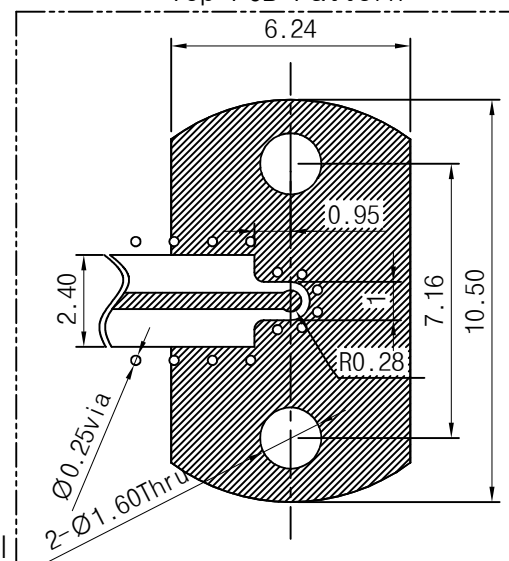

* PCB : R04003C 8mil

<Detail A>

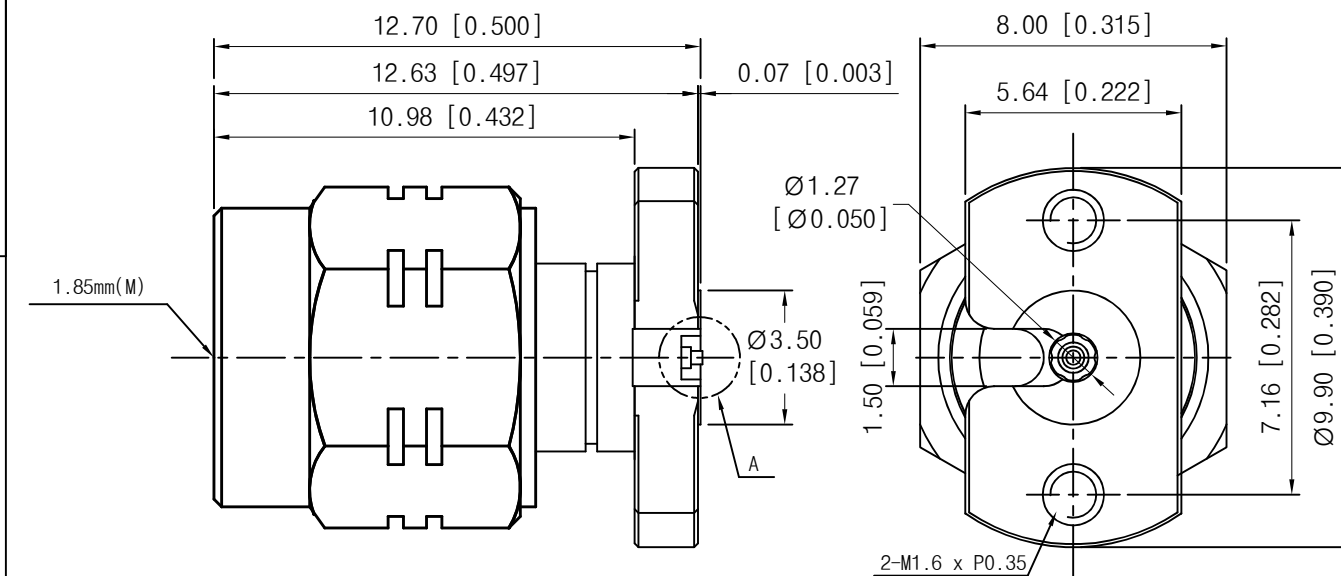

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2019. 02. 14
Unit	mm[inch]	Drawn	Teri K

withwave

Rev.
—

Title	Vertical Launch 1.85mm(M) Connector for Microstrip R04003C 8mil(PCB)
Part No.	VC01MS002