

<Specification>

1. Electrical

- 1-1. Impedance : 50Ω
- 1-2. Frequency range : DC to 50GHz
- 1-3. VSWR : 1.3:1


2. Material

- 2-1. Body : Stainless Steel(Passivated)
- 2-2. Pin : Brass(Au Plated)
- 2-3. Insulator : Ultem1000
- 2-4. Coupling Nut : Stainless Steel(Passivated)
- 2-5. C-ring : Stainless Steel(Passivated)



3. Mechanical

- 3-1. Durability : 500 Cycles

Recommended Top PCB Pattern

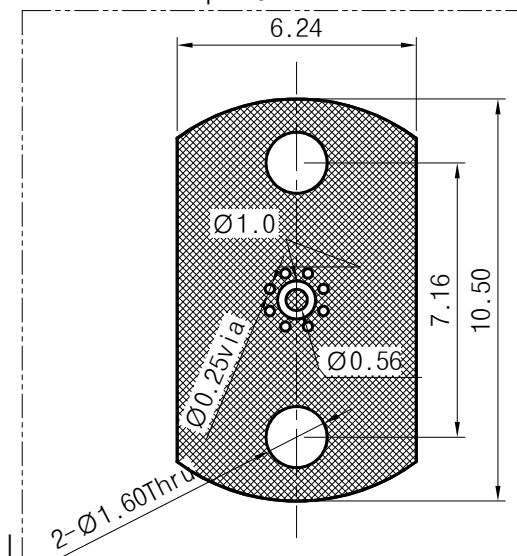

* PCB : R04003C 8mil

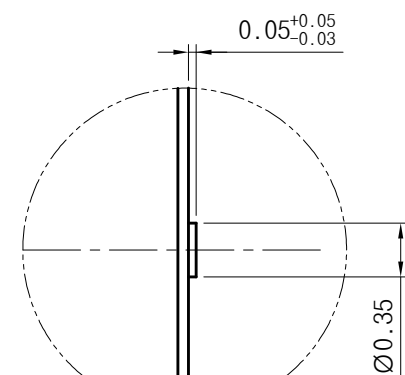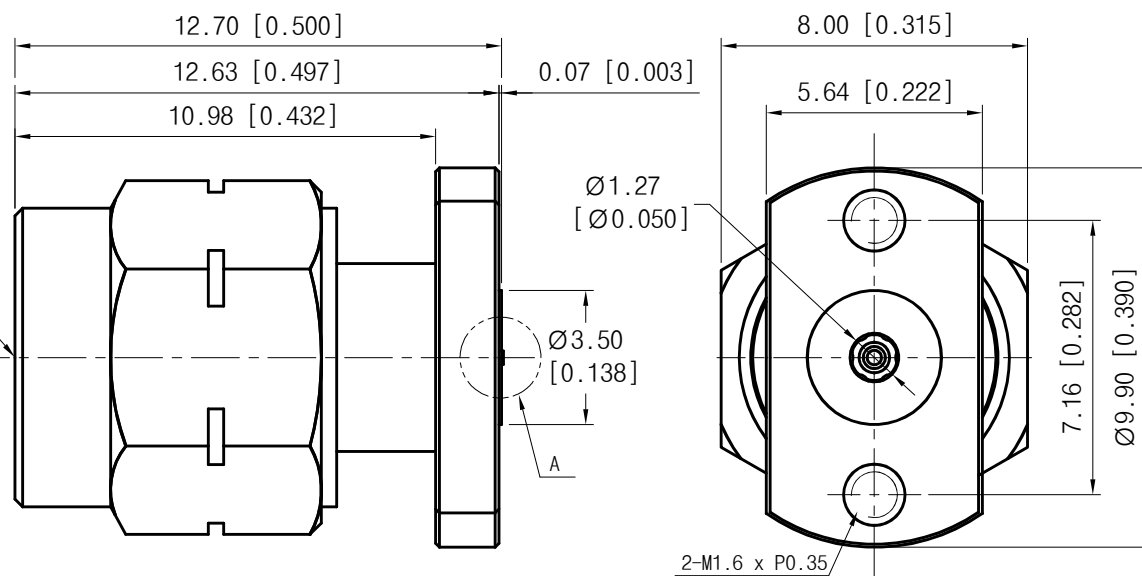

<Detail A>

Title	Vertical Launch 2.4mm(M) Connector for Stripline R04003C 8mil(PCB)		
Part No.	VC02MS001		
Scale	N/A	Date	2017. 01. 07
Unit	mm[inch]	Drawn	Teri K
withwave			Rev. —

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.