

<Specification>

1. Material

- 1) Body : Brass (Au Plated)
- 2) Center Conductor : Brass (Au Plated)
- 3) Insulator : Ultem

2. Electrical


- 1) Impedance : 50Ω
- 2) Frequency range : DC to 50GHz
- 3) VSWR(RL, Typical) : 1.6:1 (-12.7dB) to 50GHz

3. Environmental

- 1) Temp. Range : -40℃ to +125℃
- 2) RoHS Compliant

PCB Pattern

PCB : R04003C 8 mil

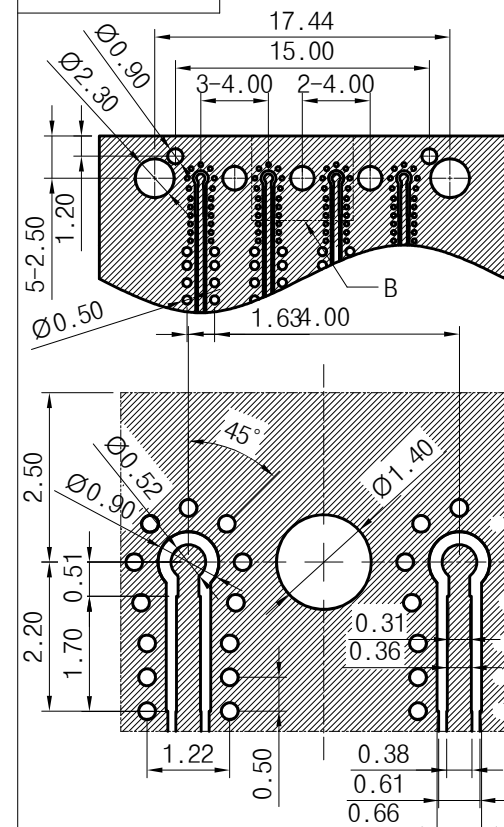

<Detail B>

Title Multi-Channel SMPM Vertical Type

Part No. WCM-4A-01N-V

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale N/A Date 2025. 10. 23

Unit mm[inch] Drawn MS KIM

withwave

Rev. —