

Precision Test Adapters

2.4 mm(F) to 2.4 mm(F) : Bulkhead type

WithWave's Precision Test Adapters are designed based on precision microwave interconnection technologies.

This 2.4 mm(F) to 2.4 mm(F) adapter with bulkhead is manufactured to precise microwave specifications and constructed with female gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 50 GHz.



■ Features

- Frequency range : DC to 50 GHz
- VSWR : 1.20 : 1(Max) @ 50 GHz
- Stainless steel (passivated)

■ Specification

| Scope | Specification | AD02F02FS3 |
|------------|-----------------------|-------------------------------|
| Electrical | Impedance(Ohm) | 50 |
| | Operation Freq.(GHz) | DC to 50 GHz |
| | VSWR (Max) | 1.20: 1 |
| Material | Dielectric | Special dielectric |
| | Center Contact | BeCu with gold plated |
| | Body | Passivated Stainless Steel |
| | Operating Temperature | -40 to +125 °C |

* RoHS Compliant


Precision Test Adapters

2.4 mm(F) to 2.4 mm(F) : Bulkhead type

■ Drawing

Part No.: AD02F02FS3

Unit : mm

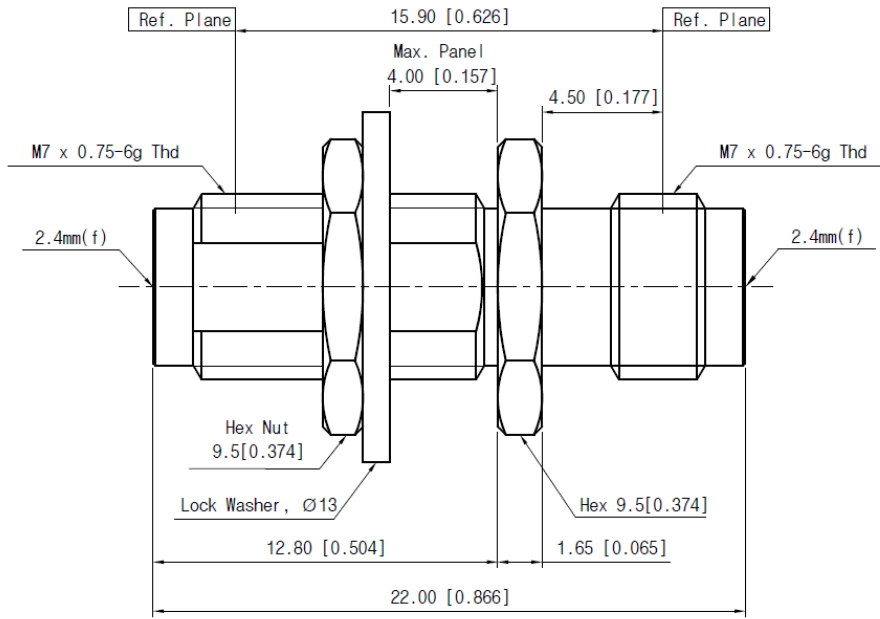

■ Test Result

