

# Precision Test Adapters

## 2.4 mm(F) to SMA(F)

**WithWave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 2.4 mm(F) to SMA(F) adapter is manufactured to precise microwave specifications and constructed with female gender on both sides. The precision microwave connector interfaces ensure an excellent microwave performance up to 26.5 GHz.



### ■ Features

- Frequency range : DC to 26.5 GHz
- VSWR : 1.20 : 1(Max) @ 26.5 GHz
- Stainless steel (passivated)

### ■ Specification


Scope	Specification	AD02F06FS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 26.5 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Beryllium copper with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-40 to +125 °C

\* RoHS Compliant

### ■ Drawing

**Part No.: AD02F06FS1**

Unit : mm

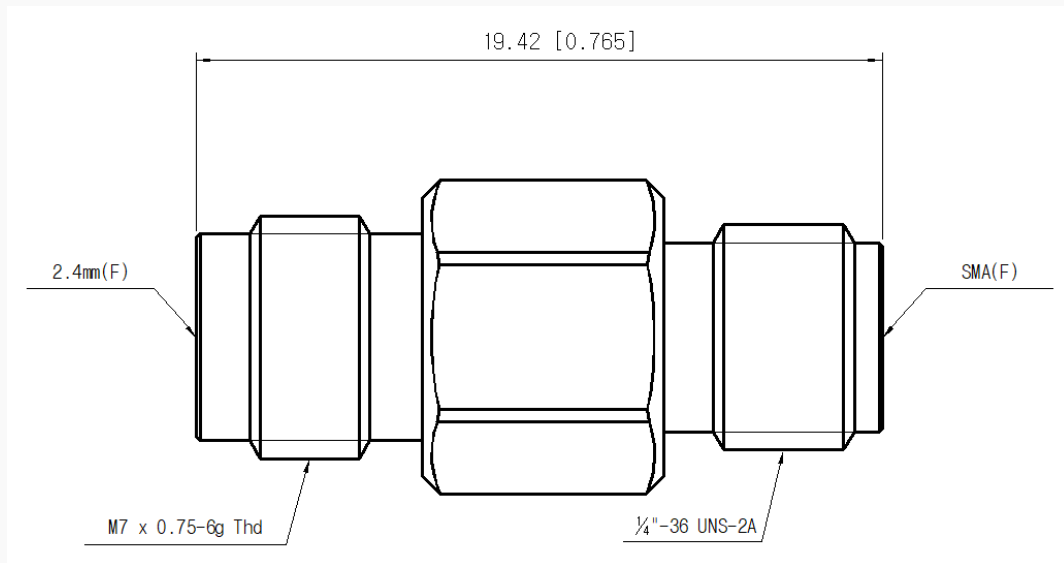

### ■ Test Result

▪ Frequency : 10 MHz to 26.5 GHz

