

# Precision Test Adapters

## 2.4 mm(M) to 3.5 mm(M)

**WithWave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 2.4 mm(M) to 3.5mm(M) adapter is manufactured to precise Microwave specifications and constructed with male gender on side 1 and male gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 34 GHz.



### ■ Features

- Frequency range : DC to 34 GHz
- VSWR : 1.25 : 1(Max) @ 34 GHz

### ■ Specification

Scope	Specification	AD02M04MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 34 GHz
	VSWR (Max)	1.25: 1
Material	Dielectric	Ultem1000
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-40 to +125 °C

\* RoHS Compliant


# Precision Test Adapters

## 2.4 mm(M) to 3.5 mm(M)

### ■ Drawing

**Part No.: AD02M04MS1**

Unit : mm[inch]

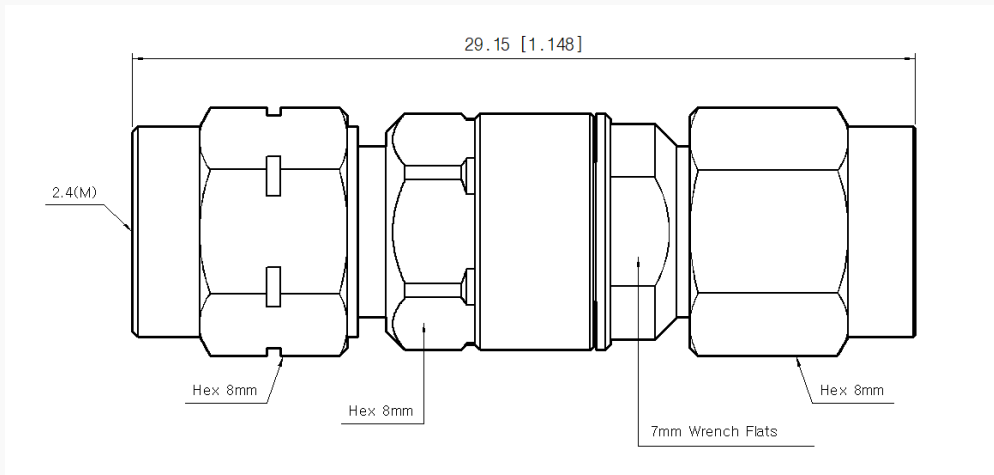

### ■ Test Result

▪ Frequency : 10 MHz to 34 GHz

