

# Precision Test Adapters

## 2.92 mm(M) to 2.92 mm(F) : Bulkhead type

**WithWave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 2.92 mm(M) to 2.92 mm(F) adapter with bulkhead is manufactured to precise microwave specifications and constructed with male gender on side 1 and female gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz.



### ■ Features

- Frequency range : DC to 40 GHz
- VSWR : 1.30 : 1(Max) @ 40 GHz
- Stainless steel (passivated)

### ■ Specification

Scope	Specification	AD03M03FS2
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 40 GHz
	VSWR (Max)	1.30: 1
	Dielectric	Special dielectric
Material	Center Contact	BeCu with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-40 to +125 °C

\* RoHS Compliant


# Precision Test Adapters

## 2.92 mm(M) to 2.92 mm(F) : Bulkhead type

### ■ Drawing

**Part No.: AD03M03FS2**

Unit : mm

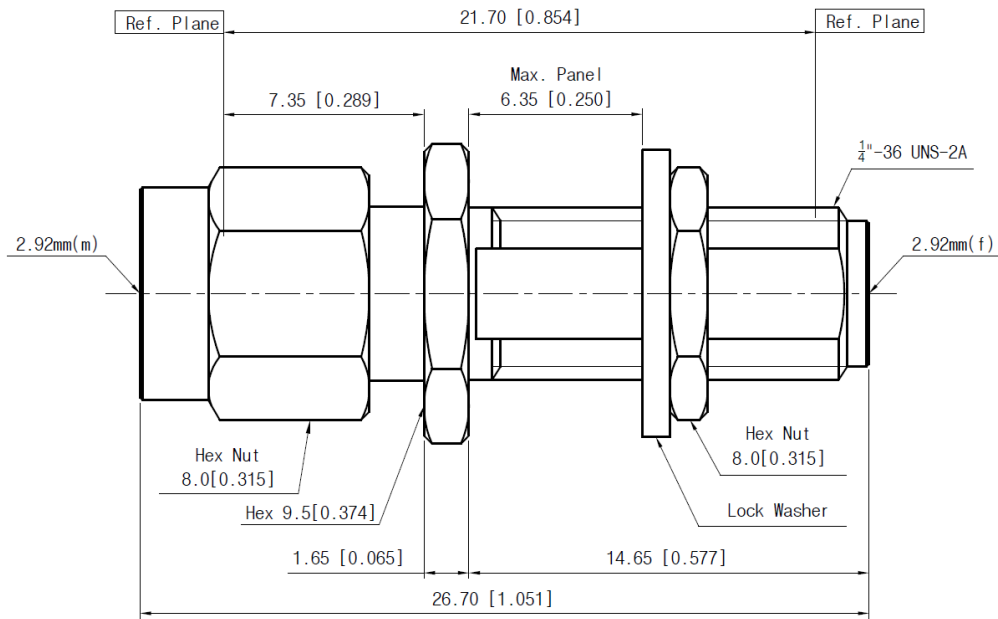

### ■ Test Result

