

WithWave's Precision Test Adapters are designed based on precision microwave interconnection technologies. This SMA(M) to SMA(M) adapter is manufactured to precise microwave specifications and constructed with male gender on side 1 and male gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 18 GHz.



■ Features

- Frequency range : DC to 18 GHz
- VSWR(Max) : 1.20 : 1
- Stainless steel (passivated)

■ Specification


Scope	Specification	AD06M06MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 18 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-40 to +125 °C

* RoHS Compliant

■ Drawing

Part No.: AD06M06MS1

Unit : mm

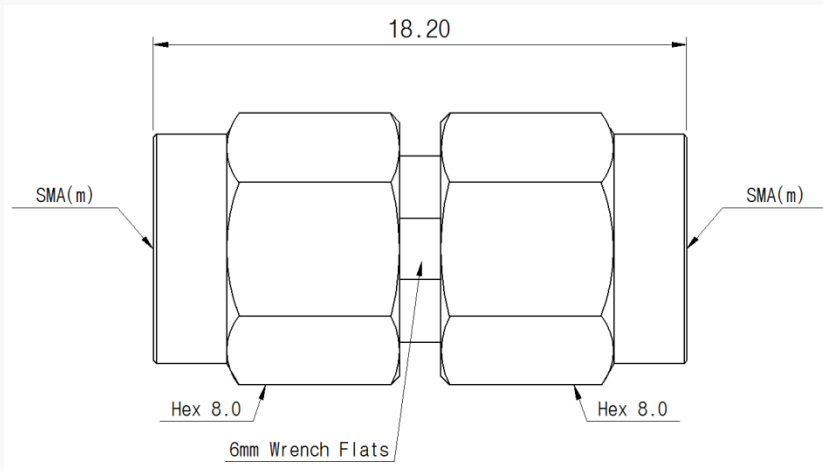

■ Test Result

