

Low PIM Test Adapters

SMA(Female) to SMA(Female)

withwave
Next Generation Connectivity

WithWave's **Low PIM Test Adapters** are designed based on precision microwave interconnection technologies. This **SMA(F) to SMA(F) adapter** is manufactured to precise microwave specifications and constructed with female gender on side 1 and female gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 6 GHz.



Features

- Frequency range : DC to 6 GHz
- VSWR(Max) : 1.20 : 1
- Passive Intermodulation (Max.) : -160 dBc
- Contact : Silver Plated Beryllium Copper

Specification

Scope	Specification	AD06F06FS4
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 6 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Beryllium copper with Silver plated
	Body	Brass with Ternary Alloy plated
	Operating Temperature	-40 to +125 °C

* RoHS Compliant

Low PIM Test Adapters


SMA(Female) to SMA(Female)

withwave
Next Generation Connectivity

■ Drawing

Part No.: AD06F06FS4

Unit : mm

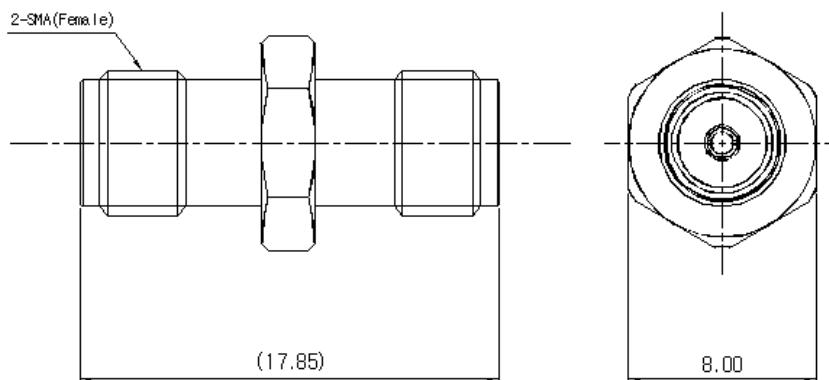

■ Test Result

▪ Frequency : 50 MHz to 6 GHz

