


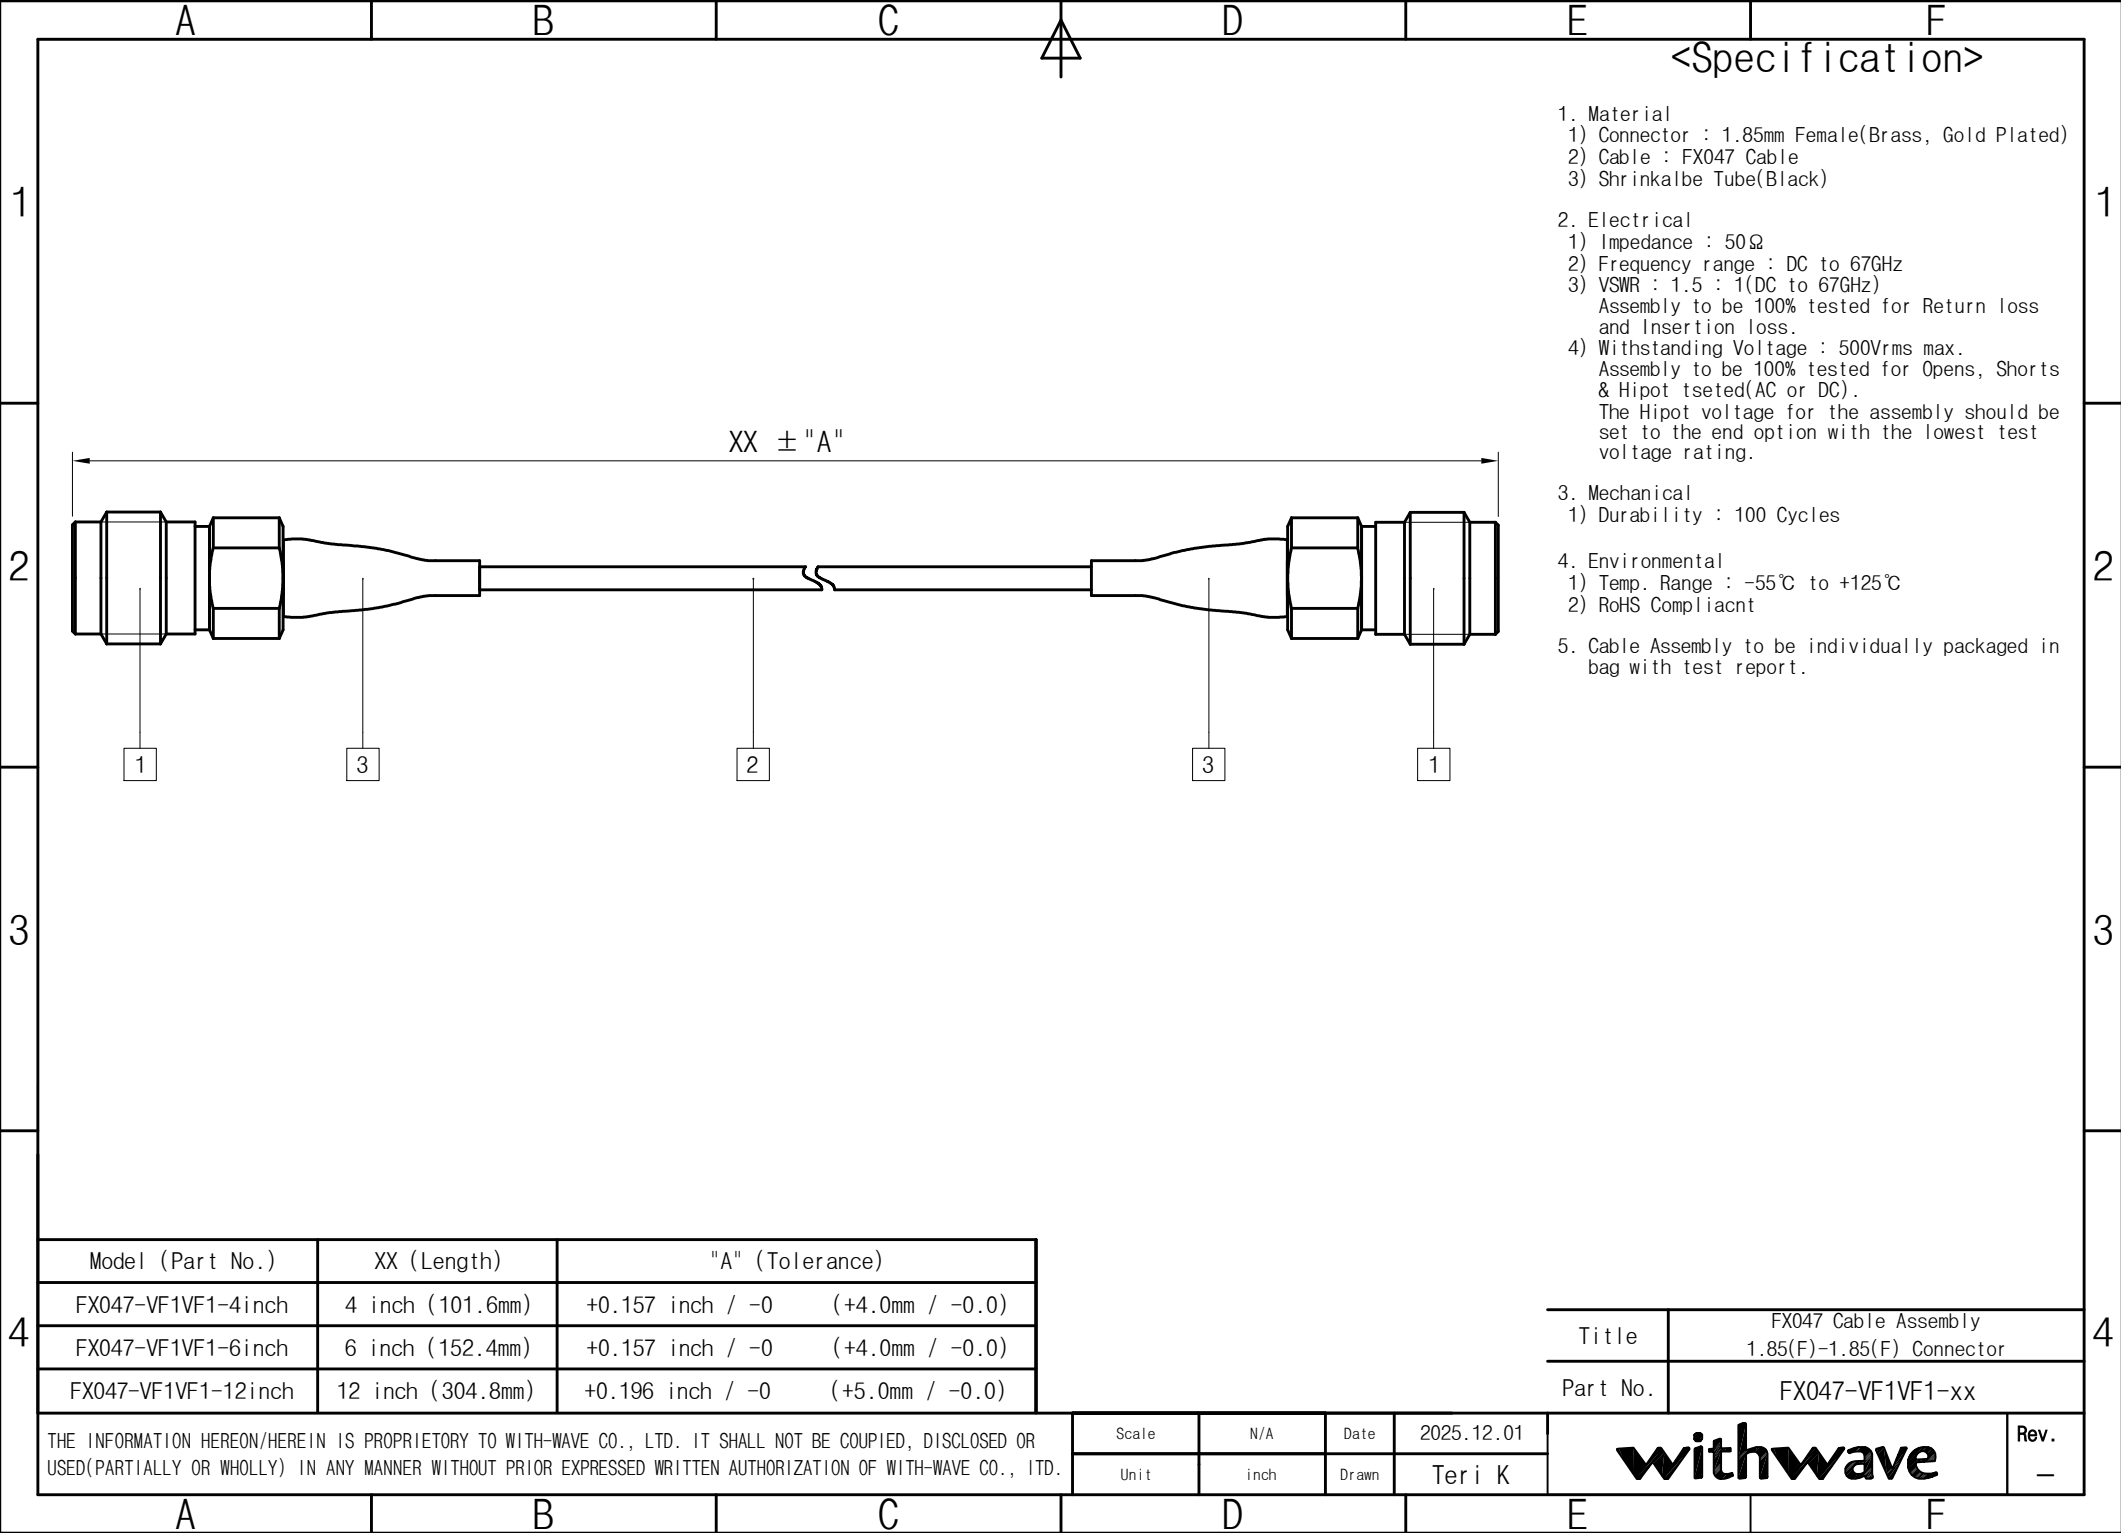

<Specification>

1. Material
- 1) Connector : 1.85mm Female(Brass, Gold Plated)
- 2) Cable : FX047 Cable
- 3) Shrinkalbe Tube(Black)
2. Electrical
- 1) Impedance : 50Ω
- 2) Frequency range : DC to 67GHz
- 3) VSWR : 1.5 : 1(DC to 67GHz)
- Assembly to be 100% tested for Return loss and Insertion loss.
- 4) Withstanding Voltage : 500Vrms max.
- Assembly to be 100% tested for Opens, Shorts & Hipot tseted(AC or DC).
- The Hipot voltage for the assembly should be set to the end option with the lowest test voltage rating.
3. Mechanical
- 1) Durability : 100 Cycles
4. Environmental
- 1) Temp. Range : -55℃ to +125℃
- 2) RoHS Compliacnt
5. Cable Assembly to be individually packaged in bag with test report.