


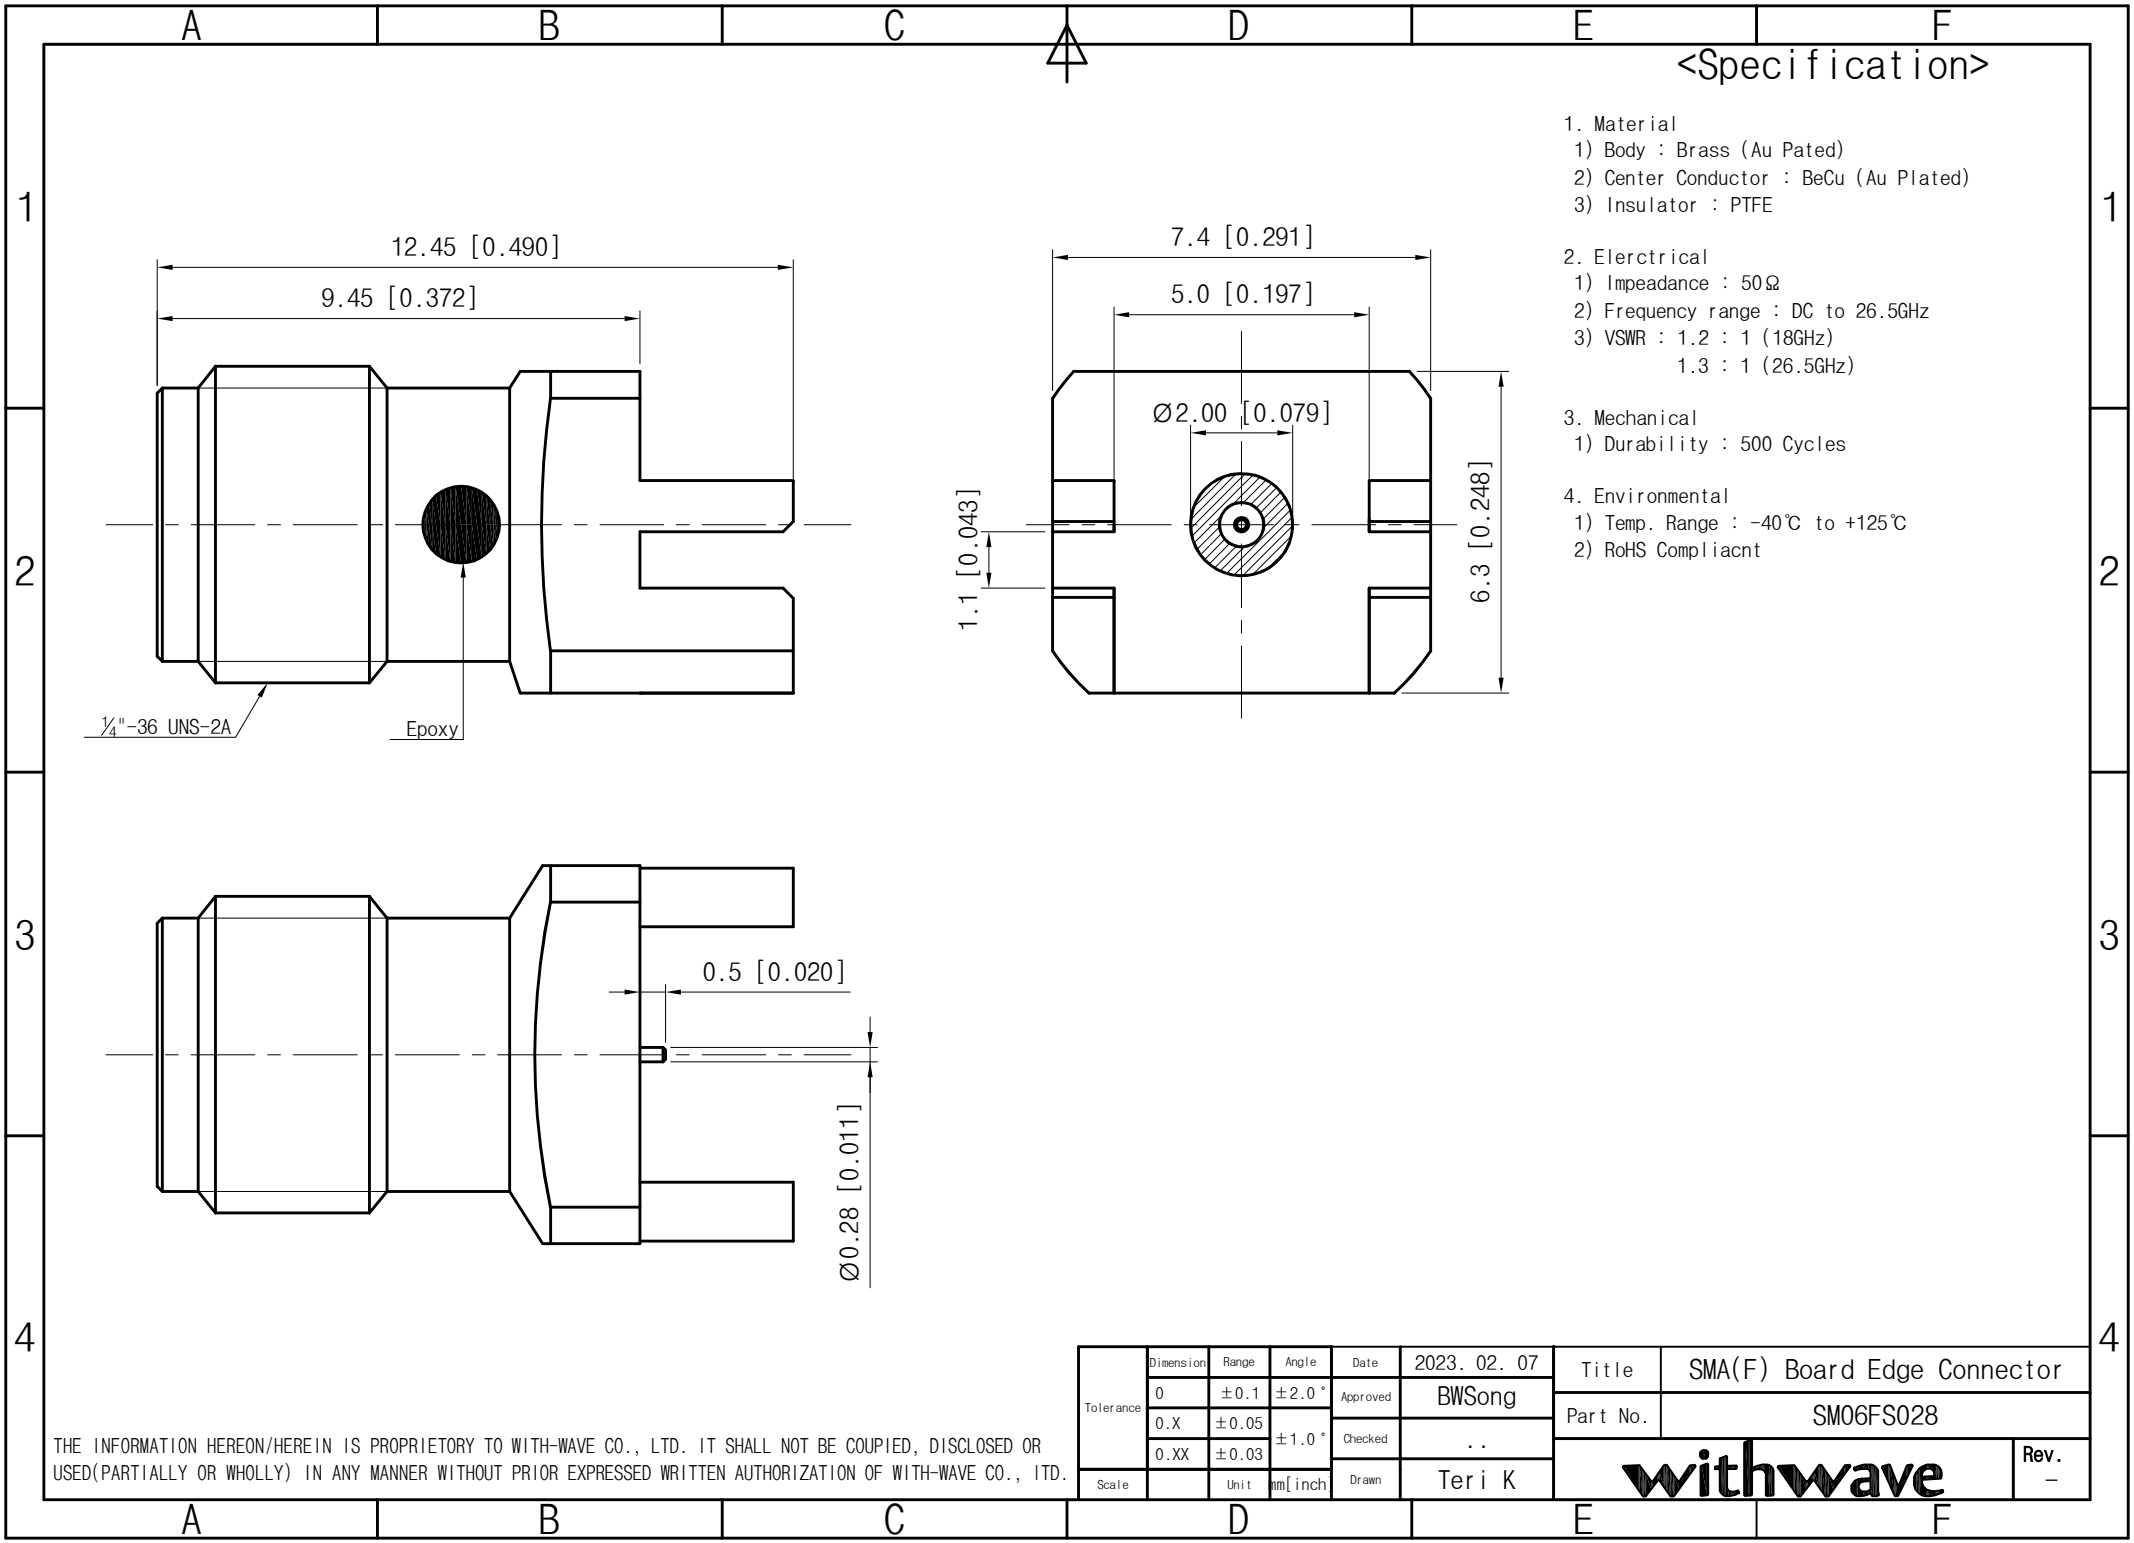

<Specification>

- 1. Material
 - 1) Body : Brass (Au Pated)
 - 2) Center Conductor : BeCu (Au Plated)
 - 3) Insulator : PTFE
- 2. Elerctrical
 - 1) Impeadance : 50Ω
 - 2) Frequency range : DC to 26.5GHz
 - 3) VSWR : 1.2 : 1 (18GHz)
1.3 : 1 (26.5GHz)
- 3. Mechanical
 - 1) Durability : 500 Cycles
- 4. Environmental
 - 1) Temp. Range : -40℃ to +125℃
 - 2) RoHS Compliacnt

Tolerance	Dimension	Range	Angle	Date	2023. 02. 07	Title	SMA(F) Board Edge Connector	
	0	±0.1	±2.0 °	Approved	BWSong	Part No.	SM06FS028	
	0.X	±0.05	±1.0 °	Checked	..			
	0.XX	±0.03		Drawn	Teri K	withwave		Rev. —
Scale		Unit	mm[inch					

THE INFORMATION HEREON/HEREIN IS PROPRIETORY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.