


<Specification>

1. Material
 - 1) Connector : 1.0mm Male(STS303, Passivated)
 - 2) Connector : 1.85mm Male(STS303, Passivated)
 - 3) Cable : WT110 Cable
 - 4) Adhesive Shrink Tube(Black)
 - 5) Marking tube(white)
2. Electrical
 - 1) Impedance : 50Ω
 - 2) Frequency range : DC to 67GHz
 - 3) VSWR : 1.4 : 1(DC to 67GHz)
Assembly to be 100% tested for Return loss and Insertion loss.
 - 4) Velocity of propagation : 80%
3. Mechanical
 - 1) Mating cycles : 500
4. Environmental
 - 1) Temp. Range : -40°C to +85°C
 - 2) RoHS Compliant
5. Cable Assembly to have protective cap assembled on each end and to be individually packaged in bag with test report.

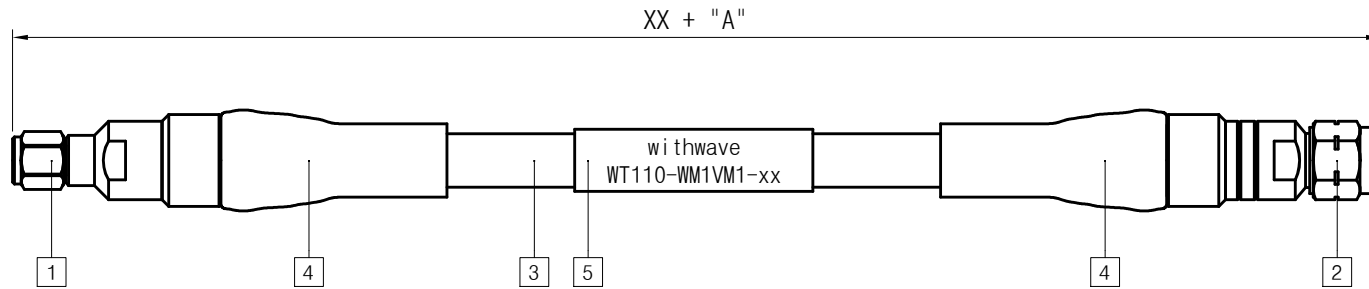

Model (Part No.)	XX (Length)	"A" (Tolerance)
WT110-WM1VM1-6inch	6 inch (152.4mm)	+0.157 inch / -0 (+4.0mm / -0.0)
WT110-WM1VM1-12inch	12 inch (304.8mm)	+0.196 inch / -0 (+5.0mm / -0.0)
WT110-WM1VM1-24inch	24 inch (609.6mm)	+0.393 inch / -0 (+10.0mm / -0.0)

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2025.12.01
Unit	inch	Drawn	Ter i K

Title	WT110 Cable Assembly 1.0mm(M)-1.85mm(M) Connector		
Part No.	WT110-WM1VM1-XX		
withwave		Rev.	-