

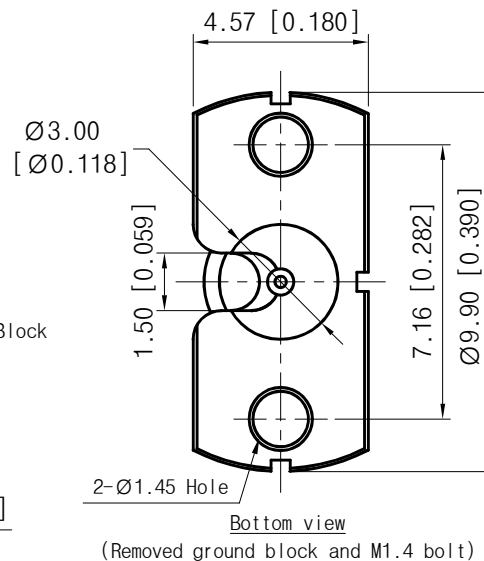


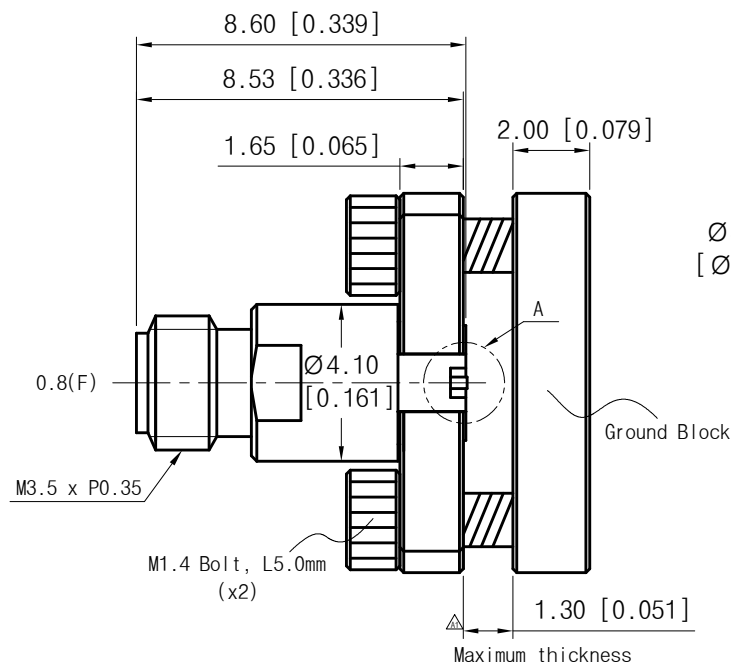


Notch information

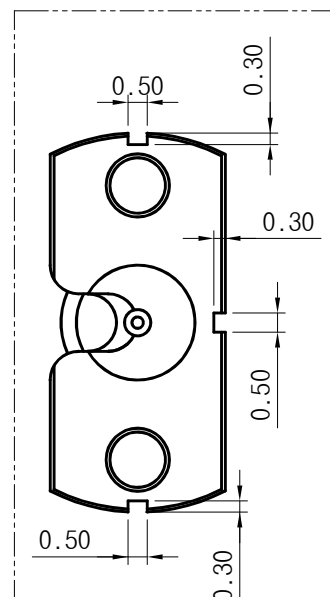

<Specification>

- Electrical
 - Impedance : 50Ω
 - Frequency range : DC to 145GHz
 - VSWR : 1.8 : 1 (145GHz)
- Material
 - Body : Stainless Steel(Passivated)
 - Pin : BeCu(Au Plated)
 - Insulator : Ultem1000
 - Metal Ground : Stainless Steel(Passivated)
 - M1.4 Bolt(x2) : Stainless Steel(Passivated)
- Mechanical
 - Durability : 500 Cycles
- Environmental
 - Temp. Range : -40°C to +125°C
 - RoHS Compliant

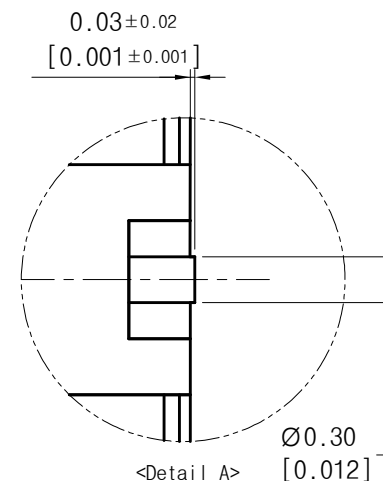

Revision			
Rev	Description	Drawn	Date
1	Maximum thickness : 1.0mm -> 1.3mm	DURIM	20250602

Title	Vertical Launch 0.8mm(F) Connector for Microstrip R03003 5mil(PCB). Notch type
Part No.	VC23FS004

THE INFORMATION HEREON/HEREIN IS PROPRIETARY TO WITH-WAVE CO., LTD. IT SHALL NOT BE COUPIED, DISCLOSED OR USED(PARTIALLY OR WHOLLY) IN ANY MANNER WITHOUT PRIOR EXPRESSED WRITTEN AUTHORIZATION OF WITH-WAVE CO., LTD.

Scale	N/A	Date	2024. 06. 11
Unit	mm[inch]	Drawn	Teri K

withwave

Rev.
A